

# Zucchetti Centro Sistemi S.p.A.



## ENVIRONMENTAL PRODUCT DECLARATION



### PRODUCTS NAME

Azzurro ZPM-258KLA-BC1  
Azzurro ZPM-215KLA-SC1  
Azzurro ZPM-258KLA-SC1

### SITES

No.8 Shiquanling Road, Dongsheng Village,  
Chenjiang Street, Zhongkai High-Tech Zone,  
516006, Huizhou City, Guangdong  
Province, P.R. China

In accordance with ISO 14025 and EN 50693

Program Operator	EPDIItaly
Publisher	EPDIItaly

Declaration number	Azzurro ZCS 008
Registration Number	EPDITALY1002

Release Date	14/07/2025
Valid until	14/07/2030

## GENERAL INFORMATION

### EPD OWNER

<b>Company Name</b>	Zucchetti Centro Sistemi S.p.A. ( <a href="https://www.zcscompany.com/it/">https://www.zcscompany.com/it/</a> )
<b>Registered office</b>	Via Lungarno, 305 52028 Terranuova Bracciolini (AR)
<b>Contact for EPD information</b>	Samanta Marzielli <ul style="list-style-type: none"> <li>e-mail: <a href="mailto:s.marzielli@zcscompany.com">s.marzielli@zcscompany.com</a>,</li> <li>Tel: 0559197422</li> </ul>

### PROGRAM OPERATOR

<b>EPDIItaly</b>	Via Gaetano De Castillia n° 10 - 20124 Milano, Italy
------------------	--

### ABOUT THE EPD

<b>Products Name</b>	Azzurro ZPM-258KLA-BC1, Azzurro ZPM-215KLA-SC1, Azzurro ZPM-258KLA-SC1
<b>Sites</b>	No.8 Shiquanling Road, Dongsheng Village, Chenjiang Street, Zhongkai High-Tech Zone, 516006, Huizhou City, Guangdong Province, P.R. China
<b>Brief description and technical information of the products</b>	The Azzurro ZPM-258KLA-BC1, ZPM-215KLA-SC1, and ZPM-258KLA-SC1 are high-efficiency modular lithium iron phosphate (LFP) battery energy storage systems designed for outdoor industrial installations. These systems combine robust performance with compact design, integrating battery capacities of 215 kWh and 258 kWh depending on the configuration. All models are equipped with advanced liquid cooling systems, anti-condensation features, and IP55-rated enclosures to ensure optimal performance in harsh environmental conditions. The SC1 variants include an integrated power conversion system with 125 kW nominal AC output and plug-and-play design, enabling rapid installation and reduced setup costs. The BC1 variant is designed for flexible integration with external power conversion units and includes multi-level fire suppression technology using perfluorohexanone gas and optional water-based extinguishing systems. All three models allow scalable expansion by connecting multiple battery cabinets in parallel and are compliant with international safety and quality standards such as IEC 62619 and UN38.3.
<b>Product application area</b>	The Azzurro ZPM-258KLA-BC1, Azzurro ZPM-215KLA-SC1 and Azzurro ZPM-258KLA-SC1 are perfectly suited for industrial applications with industrial-scale photovoltaic plants.
<b>CPC Code</b>	CPC 464 "Accumulators, primary cells and primary batteries, and parts thereof" <a href="https://unstats.un.org/unsd/classifications/Econ">https://unstats.un.org/unsd/classifications/Econ</a>

**EPD generation**

EPD generated by means of a validated tool: ZCS LCA-Tool, version 1.0, 10/03/2025

**VERIFICATION INFORMATION**

**PCR**

Core PCR: EPDIItaly007 - PCR for Electronic and Electrical Products and Systems, REV. 3.1 Issue date 12.11.2024

Sub-category PCR: EPDIItaly021 "Electronic and electrical products and systems - Energy Storage", (Rev. 5), 03/10/2024

**EPDIItaly Regulation**

Regulations of the EPDIItaly Programme Revision 6.0. Issue date 30.10.2023

**Project Report LCA**

*Life Cycle Assessment Report*

- LCA tool report

**Independent Verification Statement**

The PCR review was performed by ICMQ S.p.A.

Independent verification of the declaration and data carried out in accordance with ISO 14025:2010.

Internal  External

Third-party verification carried out by: ICMQ S.p.A., via Gaetano De Castillia n° 10 - 20124 Milan, Italy. Accredited by Accredia

**Statement Comparability**

Environmental claims published within the same product category, but from different programs, may not be comparable.

**Statement Responsibility**

The EPD Owner relieves EPDIItaly from any non-compliance with environmental legislation. The holder of the statement will be responsible for the information and supporting evidence. EPDIItaly declines all responsibility for the information, data and results provided by the EPD Owner for the life cycle assessment.

## 1. THE COMPANY

Zucchetti Centro Sistemi Spa (ZCS), founded in 1985 in the heart of Tuscany, Italy, is a leader in technological innovation, specializing in software development, robotics, automation, and renewable energy solutions. Under the visionary leadership of its founder and current CEO, Fabrizio Bernini, the company has expanded its presence in international markets, offering SMART & GREEN solutions that integrate advanced technologies. In 2000, ZCS became part of the Zucchetti Group, a prominent Italian and European leader in Information and Communication Technology (ICT). This integration has bolstered ZCS's capabilities, enabling it to develop vertically-oriented, cloud-based solutions for businesses of all sizes, aiming to enhance efficiency and effectiveness in business processes.

ZCS operates through five main business units:

- **Software:** Developing cloud-based solutions to improve business process efficiency.
- **Healthcare:** Designing integrated IT systems for healthcare facilities, including analysis labs and hospital services.
- **Automation:** Creating systems for traceability and security across various industries.
- **Robotics:** Producing innovative robots for gardening and pool maintenance, such as the Ambrogio Robot, an eco-friendly, autonomous lawn mower.
- **Green Innovation:** Distributing energy-saving solutions, including smart photovoltaic inverters and storage systems, to promote energy independence in residential, commercial, and industrial settings.

The Green Innovation Division is at the forefront of ZCS's commitment to sustainable development. It focuses on designing and delivering advanced energy solutions, including photovoltaic inverters, intelligent energy storage systems, and electric vehicle charging stations. These innovations empower residential, commercial, and industrial sectors to reduce energy consumption, enhance energy independence, and contribute to a greener future.

The company's mission focuses on improving quality of life and supporting business development through intelligent, eco-friendly technology, combining creativity with technological innovation. ZCS is committed to sustainability, emphasizing economic, environmental, and social responsibility in its operations. With a strong emphasis on research and development, ZCS's Idealab incubates innovative ideas, transforming them into market-ready solutions. The company has received numerous awards and recognitions for its commitment to innovation and social responsibility, including the prestigious "Award of Awards for Innovation" and the knighthood title "Cavaliere del Lavoro" awarded to Fabrizio Bernini in 2017.

## 2. THE PRODUCT

The Azzurro ZPM-258KLA-BC1, ZPM-215KLA-SC1, and ZPM-258KLA-SC1 are high-efficiency modular lithium iron phosphate (LFP) battery energy storage systems designed for outdoor industrial installations. These systems combine robust performance with compact design, integrating battery capacities of 215 kWh and 258 kWh depending on the configuration. All models are equipped with advanced liquid cooling systems, anti-condensation features, and IP55-rated enclosures to ensure optimal performance in harsh environmental conditions. The SC1 variants include an integrated power conversion system with 125 kW nominal AC output and plug-and-play design, enabling rapid installation and reduced setup costs. The BC1 variant is designed for flexible integration with external power conversion units and includes multi-level fire suppression technology using perfluorohexanone gas and optional water-based extinguishing systems. All three models allow scalable expansion by connecting multiple battery cabinets in parallel and are compliant with international safety and quality standards such as IEC 62619 and UN38.3.

<b>Data</b>	<b>Value</b>		
	ZPM-258KLA-BC1	ZPM-215KLA-SC1	ZPM-258KLA-SC1
<i>Technology</i>	Lithium Iron Phosphate/280Ah	Lithium Iron Phosphate/280Ah	Lithium Iron Phosphate/280Ah
<i>Coupling</i>	AC	AC	AC
<i>Battery capacity</i>	258 kW	215 kW	258 kW
<i>Nominal voltage</i>	921.6 V	768 V	921.6 V
<i>Battery operating voltage range</i>	734.4V-1036.8V	680V-864V	734.4V-1036.8V
<i>AC power to battery capacity ratio</i>	≤ 0.5		
<i>Certifications</i>	IEC 62619, UN38.3	IEC/EN 61000-6-2/4, IEC 62477-1, IEC 62619, UN38.3	
<i>Communication interface</i>	CAN, RS485	Ethernet, Bluetooth	

## 2.1. COMPOSITION

The three power magic, whose total weight are approximately 2417 kg (ZPM-258KLA-BC1), 2626 kg (ZPM-215KLA-SC1) and 2940 kg (ZPM-258KLA-SC1), is composed of different materials, including steel, aluminium and other metals for rigid parts that make up the structure and for the internal parts. There are also other materials like electronic components, plastics and others.

<b>IEC62474 Classname</b>	<b>IEC62474 ID</b>	<b>% by weight of total ZPM-258KLA-BC1</b>	<b>% by weight of total ZPM-215KLA-SC1</b>	<b>% by weight of total ZPM-258KLA-SC1</b>
Stainless steel	M-100	1,495	3,269	3,015
Other ferrous alloys, non-stainless steels	M-119	25,218	34,625	31,824
Alluminium and its alloys	M-120	3,646	3,652	3,755
Copper and its alloys	M-121	0,742	1,274	1,207
Glass	M-161	0,003	0,003	0,003
Other inorganic materials	M-199	0,807	0,803	0,718
PolyVinylChloride (PVC)	M-200	0,334	0,323	0,319
PolyEthylene (PE)	M-204	0,274	0,001	0,001
PolyCarbonate (PC)	M-204	0,012	0,274	0,245
PolyAmide (PA)	M-208	0,041	0,029	0,030
Other unfilled thermoplastics	M-249	1,462	1,500	1,540
Epoxy resin (EP)	M-302	0,053	0,039	0,035
Silicone	M-321	0,237	0,182	0,183
Rubber	M-324	0,151	0,314	0,289
Paper	M-341	0,070	0,125	0,121
Battery cell	-	64,334	49,348	52,896
Electronic components	-	1,122	4,240	3,821

No substance in the product greater than 0,10% by weight is present on the "List of Potentially Hazardous Substances" candidates for authorization under the REACH legislation.

Printed circuit boards used in this product weight 5,57 kg, and are modelled through the Ecoinvent 3.9 process "Printed wiring board, for surface mounting, Pb free surface {GLO}| printed wiring board production, for surface mounting, Pb free surface | Cut-off, S".

## 2.2. REFERENCE SERVICE LIFE (RSL)

The reference service life of the products has been assumed to be 10 years.

### 3. SCOPE AND TYPE OF EPD

This is a product-specific EPD, compliant with ISO 14025 and EN 50693 standards, as part of the EPDIItaly program, for the ZCS Azzurro ZPM-258KLA-BC1, Azzurro ZPM-215KLA-SC1 and Azzurro ZPM-258KLA-SC1. They are battery and energy storage cabinets for industrial applications that can be integrated with photovoltaic production and energy storage. The study is based on a "cradle to grave" LCA methodology, in accordance with ISO 14040 and 14044 standards. The geographical scope of the data is referred to Italy as the products are mainly sold and used in Italy. The reference year is set at 2024, considering the current technological level. The results were generated using SimaPro 9.6 modeling software.

Representativeness	Scope
Spatial	Italy
Year	2024

#### 3.1. FUNCTIONAL UNIT

The functional unit identified for the LCA study is a kWh of energy stored by the module.

#### 3.2. PRINCIPLE OF MODULARITY AND ENVIRONMENTAL RESPONSIBILITY (PPP)

In the LCA study, the principle of modularity was adopted, which allows the product life cycle to be broken down into different phases, assigning specific environmental impacts to each of them. This approach facilitates a clear attribution of environmental responsibilities at every stage of the production process, ensuring greater transparency and traceability of data.

In addition, the PPP (Polluter Pays Principle) has been complied with, according to which the entity causing an environmental impact is also the one responsible for the related mitigation or repair costs. This principle ensures that environmental costs are not passed on to the community, but are correctly attributed to those who generated them, promoting greater responsibility and incentivizing the adoption of more sustainable practices throughout the supply chain

#### 3.3. SYSTEM BOUNDARIES

The system boundary implemented in this LCA covered the entire product life cycle, i.e. from "cradle to grave", with the life cycle phases and geographical areas for all the main activities involved, grouped into five distinct modules: upstream, core and downstream, according to EN 50693. These modules have further been divided into sub-modules: manufacturing, distribution, installation, use and maintenance and end-of-life. In the context of life cycle analysis (LCA), the terms upstream, core, and downstream refer to different stages of a product's lifecycle:

- **Upstream:** It includes the initial stages of production, such as extracting raw materials, processing them, and transporting them to the production site. It therefore concerns everything that happens before the manufacture of the product.
- **Core:** This is the middle stage of the life cycle, which includes the production of the product itself, assembly, and manufacturing operations. It is the part of the process where the product is created or built.
- **Downstream:** Involves post-production stages, such as transportation to the customer, end-user use, and end-of-life disposal or recycling. It focuses on what happens to the product after it is made and distributed.

These three modules cover the entire life cycle of a product, from initial production to disposal. The product lifecycle and inventory analysis, which describe all the activities, simplified assumptions, and modeling scenarios used in LCA, have been covered exhaustively in the next section.

Manufacturing	Distribution	Installation	Use and maintenance	End of Life
Upstream - Core	Downstream	Downstream	Downstream	Downstream
√	√	√	√	√

### 3.3.1. ALLOCATION RULES


An allocation was made for electricity consumption, starting from the total annual electric energy consumed for the power magic production line and the total annual power magic production in kWh (battery capacity). Additionally, an allocation was also made for waste, based on the amount of each type of waste produced in the reference year and the total annual power magic production in kWh (battery capacity).

### 3.4. DATA QUALITY

The data used in the LCA study include both primary and secondary data. The primary data were obtained directly from Zucchetti Centro Sistemi S.p.A. and from the external manufacturing plant. This data is under the control and management of the company (e.g., bills, invoices, transport documents, weighing records). Secondary data comes from a variety of sources, including selected generic data from international databases; Proxy data: sourced from sources other than databases, used to create scenarios and fill in any information gaps. In the present study, secondary data were modeled using the Ecoinvent 3.9 database (2021), with citation of origin in the case of data from different sources.

## 4. LIFE CYCLE INVENTORY ANALYSIS (LCIA)

The Life Cycle Inventory (LCI) lists and quantifies all inflows and outflows at all declared life cycle stages of the product within the system boundary considered in relation to the scope of the study.

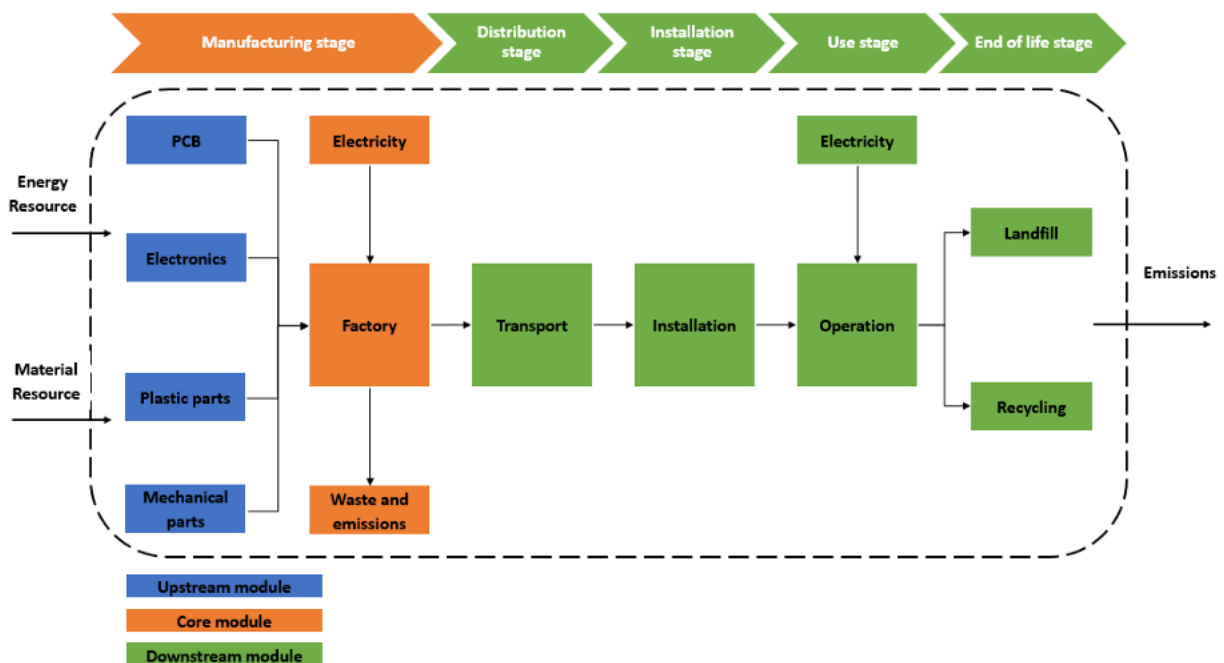

### 4.1. MANUFACTURING STAGE

The Life Cycle Study (LCA) includes both the "Upstream" phase, and the "Core" processes related to production. The Upstream phase includes the semi-finished products, the materials used in the production system and the manufacturing of the product by the external supplier in China (Huizhou City, Guangdong Province). It also includes the transportation of the raw materials and semi-finished products to the external manufacturing plant as well as the transportation of the final product from the Chinese manufacturer to Zucchetti Centro Sistemi premises, where the product is then shipped to the customer.

The core processes concern all the internal processes to which the product and its components are subjected within Zucchetti Centro Sistemi's plant. However, given that there is no manufacturing process taking place at Zucchetti Centro Sistemi's premises, the impacts considered in the core phase are related to the energy consumption of the building where the Green Innovation Division operates.

These data, extracted from the ERP and bills of the company, were entered into the SimaPro software to calculate the environmental impact of the production cycle of the product.

## 4.2. DISTRIBUTION STAGE

This stage includes the transportation of the product to the final customer. Based on the main country of shipment, in this case Italy, an assumed mean fixed value of 300 km has been chosen as distance to calculate the ton\*km value. The transportation takes place only within the European Union and is assumed to be carried by truck, EURO 4, 16-32 ton.

## 4.3. INSTALLATION STAGE

This module calculates the environmental impacts associated with the installation of the product. In this case, the product is manually installed, so there is no impact associated with it, while the impact come from the discarding of the packaging. For the impact modeling of this phase, the treatment percentage guidelines from EN 56693 and EUROSTAT were used. The distance from the recycler is assumed to be 50 km, according to the relevant PCR.

## 4.4. USE & MAINTENANCE STAGE

This module analyses the environmental impacts associated with the use and maintenance of the product, by excluding energy carriers used in maintenance, such as spare parts and materials specified by the manufacturer, due to the lack of reliable data on failure times and maintenance frequencies. The analysis of emissions during the use phase of the module is based on the information available from the product data sheet and the formulas reported in the relevant PCR and c-PCR. In particular, the total energy consumption value (expressed in kWh per RSL) is calculated using this formula:

$$E_{tot} [kWh] = E_{use} + E_{loss}$$

$$E_{use} [kWh] = \frac{P_{use} * 8760 * RSL}{1000}$$

$$E_{loss} [kWh] = \sum_{i=0}^{RSL} \frac{E_{useful\ i} * N_{cycles} * 365}{DC\ RTE_i} * (1 - DC\ RTE_i)$$

Applying the following formulas for an RSL of 10 years as reported by the corresponding c-PCR, the total energy consumption value is expected to be 135130 kWh for the Azzurro ZPM-258KLA-BC1, 127208 for the Azzurro ZPM-215KLA-SC1 and 135130 kWh for the Azzurro ZPM-258KLA-SC1.

To model this phase, a process from Ecoinvent describing the production of electric energy from photovoltaic (to which the inverter is connected, in this case in the "slanted-roof" configuration) has been used:

*"Electricity, low voltage {IT}| electricity production, photovoltaic, 3kWp slanted-roof installation, single-Si, panel, mounted | Cut-off, S".*

The emission factor (GWP) of this specific process is 0,0835 kg CO<sub>2</sub>eq/kWh.

The relevant geographic area for the use phase is Italy.

## 4.5. END OF LIFE STAGE

This section examines product end-of-life, for which Zucchetti Centro Sistemi does not have primary data that can be used in the LCA study. End-of-life has been calculated according to the end-of-life scenarios outlined in the EN 50693 and EUROSTAT (the only exception is for batteries and electronic components, for which a specific process from Ecoinvent was directly applied), estimating a distance from the recycler of 50 km by truck, EURO 4, 16-32 ton. For the environmental impact of the different waste treatments, the EcoInvent database has been used.

## 5. RESULTS

In this section, the results of the study are presented, divided by different impact parameters and by the phases of the study that constituted the LCA.

Environmental impacts were calculated using the EN 15804 + A2, Cumulative Energy Demand (LHV), Selected LCI results, additional, and EDIP 2003 methodologies, as indicated in the SimaPro Methods library. These methodologies are used to calculate environmental impact categories, resource use and waste produced, as required by the PCR: EPDIItaly007-PCR for electronic and electrical products and systems (Stand-alone) - Rev 3.1.

### 5.1. ENVIRONMENTAL IMPACTS

#### ZPM-258KLA-BC1

<i>Impact indicators</i>	<b>Nomenclatures</b>	<b>Unit</b>	<b>Total</b>	<i>Upstream - Core</i>		<i>Downstream</i>		
				<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use &amp; Maintenance</b>	<b>End of Life</b>
<i>Global warming Potential - Total</i>	GWP - Total	kg CO2 eq	1,39E+02	9,36E+01	5,51E-01	5,49E-02	4,37E+01	6,82E-01
<i>Global warming Potential - Fossil</i>	GWP - Fossil	kg CO2 eq	1,37E+02	9,27E+01	5,01E-04	4,73E-02	4,35E+01	5,94E-01
<i>Global warming Potential - Biogenic</i>	GWP - Biogenic	kg CO2 eq	1,16E+00	3,68E-01	5,50E-01	7,58E-03	1,48E-01	8,79E-02
<i>Global warming Potential - Land use and LU change</i>	GWP - Luluc	kg CO2 eq	6,46E-01	5,64E-01	2,69E-04	7,84E-07	8,20E-02	5,95E-05
<i>Ozone depletion Potential</i>	ODP	kg CFC11 eq	5,87E-06	3,11E-06	1,21E-08	4,75E-11	2,74E-06	3,56E-09
<i>Acidification Potential</i>	AP	mol H+ eq	1,30E+00	9,68E-01	2,28E-03	1,23E-05	3,27E-01	5,66E-04
<i>Eutrophication Potential, freshwater</i>	EP - freshwater	kg P eq	8,58E-02	5,89E-02	3,88E-05	2,07E-07	2,68E-02	1,41E-05
<i>Eutrophication Potential, marine</i>	EP - marine	kg N eq	2,02E-01	1,51E-01	8,70E-04	9,23E-06	5,01E-02	3,72E-04
<i>Eutrophication Potential, terrestrial</i>	EP - terrestrial	mol N eq	1,87E+00	1,34E+00	9,28E-03	5,73E-05	5,24E-01	2,32E-03
<i>Photochemical ozone formation Potential</i>	POCP	kg NMVOC eq	6,31E-01	4,41E-01	3,34E-03	1,67E-05	1,86E-01	7,71E-04
<i>Resource use Potential, minerals and metals</i>	ADP - minerals&metals	kg Sb eq	8,80E-03	6,16E-03	1,78E-06	4,95E-09	2,64E-03	3,62E-07
<i>Resource use Potential, fossil</i>	ADP - fossil	MJ	1,67E+03	1,11E+03	7,85E+00	2,26E-02	5,45E+02	1,58E+00
<i>Water deprivation Potential</i>	WDP	m3 depriv.	6,22E+01	3,06E+01	3,20E-02	7,61E-04	3,15E+01	9,45E-02

### ZPM-215KLA-SC1

<i>Impact indicators</i>	<b>Nomenclatures</b>	<b>Unit</b>	<b>Total</b>	<i>Upstream - Core</i>		<i>Downstream</i>		
				<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use &amp; Maintenance</b>	<b>End of Life</b>
<i>Global warming Potential - Total</i>	GWP - Total	kg CO2 eq	1,86E+02	1,34E+02	7,25E-01	8,30E-02	4,94E+01	9,09E-01
<i>Global warming Potential - Fossil</i>	GWP - Fossil	kg CO2 eq	1,82E+02	1,32E+02	6,59E-04	7,32E-02	4,92E+01	7,94E-01
<i>Global warming Potential - Biogenic</i>	GWP - Biogenic	kg CO2 eq	1,71E+00	6,96E-01	7,24E-01	9,77E-03	1,68E-01	1,15E-01
<i>Global warming Potential - Land use and LU change</i>	GWP - Luluc	kg CO2 eq	1,35E+00	1,26E+00	3,54E-04	3,33E-06	9,27E-02	7,98E-05
<i>Ozone depletion Potential</i>	ODP	kg CFC11 eq	1,67E-05	1,36E-05	1,58E-08	4,06E-10	3,10E-06	4,75E-09
<i>Acidification Potential</i>	AP	mol H+ eq	1,80E+00	1,43E+00	3,00E-03	2,87E-05	3,70E-01	7,63E-04
<i>Eutrophication Potential, freshwater</i>	EP - freshwater	kg P eq	1,17E-01	8,62E-02	5,10E-05	1,03E-06	3,03E-02	2,04E-05
<i>Eutrophication Potential, marine</i>	EP - marine	kg N eq	2,65E-01	2,07E-01	1,14E-03	1,51E-05	5,66E-02	5,16E-04
<i>Eutrophication Potential, terrestrial</i>	EP - terrestrial	mol N eq	2,56E+00	1,95E+00	1,22E-02	1,08E-04	5,92E-01	3,12E-03
<i>Photochemical ozone formation Potential</i>	POCP	kg NMVOC eq	8,84E-01	6,69E-01	4,39E-03	3,28E-05	2,10E-01	1,04E-03
<i>Resource use Potential, minerals and metals</i>	ADP - minerals&metals	kg Sb eq	1,72E-02	1,43E-02	2,34E-06	1,95E-08	2,98E-03	4,79E-07
<i>Resource use Potential, fossil</i>	ADP - fossil	MJ	2,24E+03	1,61E+03	1,03E+01	5,94E-02	6,15E+02	2,12E+00
<i>Water deprivation Potential</i>	WDP	m3 depriv.	7,41E+01	3,84E+01	4,21E-02	2,55E-02	3,55E+01	1,22E-01

### ZPM-258KLA-SC1

<i>Impact indicators</i>	<b>Nomenclatures</b>	<b>Unit</b>	<b>Total</b>	<i>Upstream - Core</i>	<i>Downstream</i>			
				<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use &amp; Maintenance</b>	<b>End of Life</b>
<i>Global warming Potential - Total</i>	GWP - Total	kg CO2 eq	1,71E+02	1,25E+02	6,72E-01	6,92E-02	4,37E+01	8,24E-01
<i>Global warming Potential - Fossil</i>	GWP - Fossil	kg CO2 eq	1,68E+02	1,24E+02	6,11E-04	6,10E-02	4,35E+01	7,17E-01
<i>Global warming Potential - Biogenic</i>	GWP - Biogenic	kg CO2 eq	1,53E+00	6,00E-01	6,71E-01	8,14E-03	1,48E-01	1,07E-01
<i>Global warming Potential - Land use and LU change</i>	GWP - Luluc	kg CO2 eq	1,17E+00	1,09E+00	3,28E-04	2,77E-06	8,20E-02	7,38E-05
<i>Ozone depletion Potential</i>	ODP	kg CFC11 eq	1,45E-05	1,17E-05	1,47E-08	3,38E-10	2,74E-06	4,38E-09
<i>Acidification Potential</i>	AP	mol H+ eq	1,67E+00	1,34E+00	2,78E-03	2,39E-05	3,27E-01	7,03E-04
<i>Eutrophication Potential, freshwater</i>	EP - freshwater	kg P eq	1,08E-01	8,07E-02	4,73E-05	8,59E-07	2,68E-02	1,85E-05
<i>Eutrophication Potential, marine</i>	EP - marine	kg N eq	2,46E-01	1,95E-01	1,06E-03	1,26E-05	5,01E-02	4,71E-04
<i>Eutrophication Potential, terrestrial</i>	EP - terrestrial	mol N eq	2,36E+00	1,82E+00	1,13E-02	8,98E-05	5,24E-01	2,87E-03
<i>Photochemical ozone formation Potential</i>	POCP	kg NMVOC eq	8,11E-01	6,20E-01	4,07E-03	2,74E-05	1,86E-01	9,56E-04
<i>Resource use Potential, minerals and metals</i>	ADP - minerals&metals	kg Sb eq	1,54E-02	1,28E-02	2,17E-06	1,63E-08	2,64E-03	4,44E-07
<i>Resource use Potential, fossil</i>	ADP - fossil	MJ	2,06E+03	1,50E+03	9,58E+00	4,95E-02	5,45E+02	1,96E+00
<i>Water deprivation Potential</i>	WDP	m3 depriv.	6,83E+01	3,67E+01	3,91E-02	2,13E-02	3,15E+01	1,12E-01

## 5.2. USE OF RESOURCES

### ZPM-258KLA-BC1

Parameter	Nomenclatures	Unit	Total	Upstream - Core		Downstream		
				Manufacturing	Distribution	Installation	Use & Maintenance	End of Life
Renewable primary energy as energy carrier	PERE	MJ	2,24E+03	1,32E+02	1,22E-01	4,52E-04	2,11E+03	3,50E-02
Renewable primary energy resource as material utilization	PERM	MJ	1,08E+00	1,08E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renewable primary energy resources	PERT	MJ	2,24E+03	1,33E+02	1,22E-01	4,52E-04	2,11E+03	3,50E-02
Non-renewable primary energy as energy carrier	PENRE	MJ	1,66E+03	1,10E+03	7,85E+00	2,26E-02	5,45E+02	1,58E+00
Non-renewable primary energy as material utilization	PENRM	MJ	8,73E+00	8,73E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of non-renewable primary energy resources	PENRT	MJ	1,66E+03	1,11E+03	7,85E+00	2,26E-02	5,45E+02	1,58E+00
Use of secondary material	SM	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels	RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non-renewable secondary fuels	NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water	FW	m3	2,09E+00	9,16E-01	1,12E-03	2,56E-05	1,17E+00	2,98E-03

### ZPM-215KLA-SC1

Parameter	Nomenclatures	Unit	Total	Upstream - Core		Downstream		
				Manufacturing	Distribution	Installation	Use & Maintenance	End of Life
Renewable primary energy as energy carrier	PERE	MJ	2,57E+03	1,89E+02	1,61E-01	3,22E-03	2,38E+03	4,71E-02
Renewable primary energy resource as material utilization	PERM	MJ	1,65E+00	1,65E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renewable primary energy resources	PERT	MJ	2,58E+03	1,91E+02	1,61E-01	3,22E-03	2,38E+03	4,71E-02
Non-renewable primary energy as energy carrier	PENRE	MJ	2,23E+03	1,60E+03	1,03E+01	5,94E-02	6,15E+02	2,12E+00
Non-renewable primary energy as material utilization	PENRM	MJ	1,11E+01	1,11E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of non-renewable primary energy resources	PENRT	MJ	2,24E+03	1,61E+03	1,03E+01	5,94E-02	6,15E+02	2,12E+00
Use of secondary material	SM	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels	RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non-renewable secondary fuels	NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water	FW	m3	2,57E+00	1,24E+00	1,47E-03	7,83E-04	1,33E+00	3,89E-03

### ZPM-258KLA-SC1

<b>Parameter</b>	<b>Nomenclatures</b>	<b>Unit</b>	<b>Total</b>	<i>Upstream - Core</i>		<i>Downstream</i>		
				<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use &amp; Maintenance</b>	<b>End of Life</b>
<i>Renewable primary energy as energy carrier</i>	PERE	MJ	2,29E+03	1,77E+02	1,49E-01	2,68E-03	2,11E+03	4,35E-02
<i>Renewable primary energy resource as material utilization</i>	PERM	MJ	1,21E+00	1,21E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Total use of renewable primary energy resources</i>	PERT	MJ	2,29E+03	1,79E+02	1,49E-01	2,68E-03	2,11E+03	4,35E-02
<i>Non-renewable primary energy as energy carrier</i>	PENRE	MJ	2,05E+03	1,49E+03	9,58E+00	4,95E-02	5,45E+02	1,96E+00
<i>Non-renewable primary energy as material utilization</i>	PENRM	MJ	1,01E+01	1,01E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Total use of non-renewable primary energy resources</i>	PENRT	MJ	2,06E+03	1,50E+03	9,58E+00	4,95E-02	5,45E+02	1,96E+00
<i>Use of secondary material</i>	SM	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Use of renewable secondary fuels</i>	RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Use of non-renewable secondary fuels</i>	NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Net use of fresh water</i>	FW	m3	2,35E+00	1,17E+00	1,37E-03	6,53E-04	1,17E+00	3,57E-03

### 5.3. WASTE AND OUTPUT FLOWS

#### ZPM-258KLA-BC1

<i>Parameter/indicator</i>	<b>Nomenclatures</b>	<b>Unit</b>	<b>Total</b>	<i>Upstream - Core</i>		<i>Downstream</i>		
				<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use &amp; Maintenance</b>	<b>End of Life</b>
<i>Hazardous waste disposed</i>	HWD	Kg	6,53E-01	4,68E-02	1,94E-04	1,15E-03	4,05E-01	2,00E-01
<i>Non-hazardous waste disposed</i>	NHWD	Kg	1,29E+01	5,45E+00	3,84E-01	9,23E-03	6,53E+00	4,83E-01
<i>Radioactive waste disposed</i>	RWD	Kg	1,25E-03	2,67E-04	2,55E-06	7,72E-09	9,83E-04	6,13E-07
<i>Components for re-use</i>	CRU	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Materials for recycling</i>	MFR	Kg	2,37E+00	0,00E+00	0,00E+00	8,14E-02	0,00E+00	2,29E+00
<i>Materials for energy recovery</i>	MER	Kg	1,72E-01	0,00E+00	0,00E+00	1,37E-02	0,00E+00	1,58E-01
<i>Exported thermal energy</i>	EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Exported electricity energy</i>	EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

#### ZPM-215KLA-SC1

<i>Parameter/indicator</i>	<b>Nomenclatures</b>	<b>Unit</b>	<b>Total</b>	<i>Upstream - Core</i>		<i>Downstream</i>		
				<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use &amp; Maintenance</b>	<b>End of Life</b>
<i>Hazardous waste disposed</i>	HWD	Kg	8,84E-01	7,75E-02	2,56E-04	1,71E-03	4,58E-01	3,47E-01
<i>Non-hazardous waste disposed</i>	NHWD	Kg	2,01E+01	1,14E+01	5,05E-01	1,88E-02	7,38E+00	7,84E-01
<i>Radioactive waste disposed</i>	RWD	Kg	2,24E-03	1,13E-03	3,36E-06	4,20E-08	1,11E-03	8,25E-07
<i>Components for re-use</i>	CRU	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Materials for recycling</i>	MFR	Kg	4,24E+00	0,00E+00	0,00E+00	1,19E-01	0,00E+00	4,12E+00
<i>Materials for energy recovery</i>	MER	Kg	2,33E-01	0,00E+00	0,00E+00	2,17E-02	0,00E+00	2,12E-01
<i>Exported thermal energy</i>	EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Exported electricity energy</i>	EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

**ZPM-258KLA-SC1**

<b>Parameter/indicator</b>	<b>Nomenclatures</b>	<b>Unit</b>	<b>Total</b>	<i>Upstream - Core</i>		<i>Downstream</i>		
				<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use &amp; Maintenance</b>	<b>End of Life</b>
<i>Hazardous waste disposed</i>	HWD	Kg	7,82E-01	7,04E-02	2,37E-04	1,42E-03	4,05E-01	3,05E-01
<i>Non-hazardous waste disposed</i>	NHWD	Kg	1,77E+01	9,98E+00	4,68E-01	1,57E-02	6,53E+00	6,93E-01
<i>Radioactive waste disposed</i>	RWD	Kg	1,95E-03	9,59E-04	3,11E-06	3,50E-08	9,83E-04	7,63E-07
<i>Components for re-use</i>	CRU	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Materials for recycling</i>	MFR	Kg	3,67E+00	0,00E+00	0,00E+00	9,91E-02	0,00E+00	3,57E+00
<i>Materials for energy recovery</i>	MER	Kg	2,10E-01	0,00E+00	0,00E+00	1,81E-02	0,00E+00	1,92E-01
<i>Exported thermal energy</i>	EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<i>Exported electricity energy</i>	EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

## BIBLIOGRAPHY

1. Core PCR: EPDIItaly007 - PCR for Electronic and Electrical Products and Systems, REV. 3.1  
Issue date 12.11.2024
2. ISO 14040:2006 'Principles and framework' which contains the principles and framework for life cycle assessment and a description of the structure of an LCA analysis
3. ISO 14044:2006 "Requirements and guidelines" which is the main support for the practical application of a life cycle study.
4. UNI EN ISO 14025 :2010, Environmental labels and declarations – Type III environmental declarations – Principles and procedures (ISO 14025 :2006)
5. EN 50693:2019 "*Product category rules for life cycle assessments of electronic and electrical products and systems*"
6. Regulations of the EPDIItaly Programme Revision 6.0. Issue date 30.10.2023
7. LCA tool report - Rev 1.0, 10/03/2025
8. Special Waste Report, 2023 Edition, ISPRA -  
<https://www.isprambiente.gov.it/it/pubblicazioni/rapporti/rapporto-rifiuti-speciali-edizione-2023>
9. Department for Environment, Food & Rural Affairs  
<https://www.gov.uk/government/organisations/department-for-environment-food-rural-affairs>