

CHANGZHOU EGING PHOTOVOLTAIC TECHNOLOGY CO LTD



ENVIRONMENTAL PRODUCT DECLARATION

PRODUCT NAME: EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRc/BF-DG, EG-XXXNT66-HRc/BF-DG

PLANTS: CHANGZHOU EGING PHOTOVOLTAIC TECHNOLOGY CO., LTD.

in compliance with ISO 14025

Program Operator	UL
Publisher	EPDItaly

Declaration Number	4791735270.101.2
Registration Number	MR-EPDITALY0145

Issue Date	_2025_ / _10_ / __30__
Valid to	_2030_ / _10_ / __30__



ENVIRONMENTAL PRODUCT DECLARATION

**EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV,
EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-
HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-
XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV,
EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-
XXXNT48-HRc/BF-DG, EG-XXXNT66-HRc/BF-DG**

PHOTOVOLTAIC MODULES

CHANGZHOU EGING PHOTOVOLTAIC TECHNOLOGY CO., LTD.



Changzhou EGing Photovoltaic Technology Co., Ltd is committed to changing the traditional energy pattern, focusing on the production and promotion of new energy products, at the same time, pay attention to the production of environmental protection, energy saving and consumption reduction, and effectively fulfill the responsibility of the enterprise to the environment.

The basic LCA and EPD are developed based on ISO14025 and scientific LCA method. By the Quantitative evaluation of the environmental impacts of product entire life cycle, hot spots of impacts can be identified, and product improvement can be promoted. In addition, EPD must undergo strict third-party review and approval, and the release of validated and effective information can assist us in conducting supply chain communication, reflecting our sustainable development concept.



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules

According to ISO 14025,
EN 50693:2019/AC:2021

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL ENVIRONMENT 333 PFINGSTEN ROAD NORTHBROOK, IL 60611 HTTPS://WWW.UL.COM/ HTTPS://SPOT.UL.COM/
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	PROGRAM OPERATOR RULES V2.7 2022
MANUFACTURER NAME AND ADDRESS	Changzhou EGing Photovoltaic Technology Co., Ltd. No. 18, Jinwu Road, Yaotang Town, Jintan District, Changzhou City, Jiangsu Province, P.R. China
DECLARATION NUMBER	4791735270.101.2
DECLARED PRODUCT & FUNCTIONAL UNIT	EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF- DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG 1 kWh of electricity generated as output from the solar photovoltaic plant
REFERENCE PCR AND VERSION NUMBER	PCR EPDItaly014: Electricity Produced by Photovoltaic Modules.
DESCRIPTION OF PRODUCT APPLICATION/USE	EGing solar monocrystalline silicon PY modules are widely used to generate electricity on rooftop and ground solar farms
PRODUCT RSL DESCRIPTION (IF APPL.)	30 Years
MARKETS OF APPLICABILITY	Europe
DATE OF ISSUE	October 30, 2025
PERIOD OF VALIDITY	5 years
EPD TYPE	Product-specific
RANGE OF DATASET VARIABILITY	N/A
EPD SCOPE	Cradle to grave
YEAR(S) OF REPORTED PRIMARY DATA	2022.7-2024.12
LCA SOFTWARE & VERSION NUMBER	Simapro 10.2.0.2
LCI DATABASE(S) & VERSION NUMBER	Ecoinvent 3.11
LCIA METHODOLOGY & VERSION NUMBER	EN 15804+A2 Method V1.03

The PCR review was conducted by:

EPDItaly Program

PCR Moderator & PCR Committee

info@epditaly.it

This declaration was independently verified in accordance with ISO 14025: 2006.

☐ INTERNAL

☒ EXTERNAL

Skye Tang, UL Solutions

Skye Tang

This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:

Kung An, UL Solutions

This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:

Sung Mo Yeon, H.I.P. Pathway

Sung Mo Yeon

LIMITATIONS

Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

Accuracy of Results: EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

Comparability: EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

1. Product Definition and Information

1.1. Description of Company/Organization

Founded in May 2003, Changzhou EGing Photovoltaic Technology Co., Ltd is a wholly-owned subsidiary of EGing Optoelectronics Technology Co., Ltd. and with a registered capital of RMB 2,129,460,000, more than 5,000 employees and an area of more than 2,500 acres. Its main business is the production and sale of high-efficiency crystalline silicon solar cells and modules, with an annual production capacity of more than 25GW of solar cells and modules. The company also has successful experience in the construction and operation of photovoltaic power plants, and the industrial chain is further extended to the field of photovoltaic power plants.

1.2. Product Description

Product Identification

The EGing Solar's PV modules under analysis integrate various advanced technologies like multi-busbar and Gallium-doped wafer, with the highest power up to 730W and up to 23.5% module efficiency. Besides, the gallium-doped technology overcomes the light attenuation of the module and ensures the long-term power generation stability of the module. Application of these modules can remarkably reduce the number of modules employed in a power station, thus lowering the corresponding cost of supports, cables, construction and land, improving the return on investment.

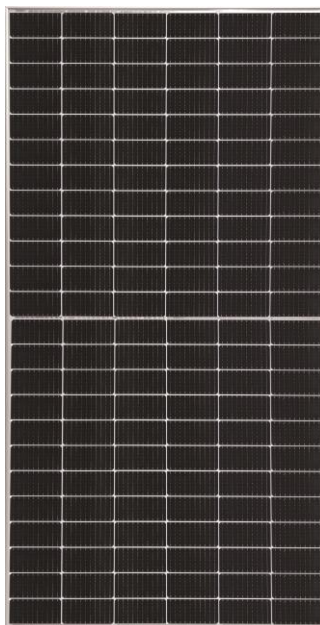


Figure 1. EGing Solar's PV modules

Product Specification

EGing produces more than a dozen series of mono-crystalline silicon PV modules. Within this project, EGing Solar PV single crystal half plate double sided double and single crystal half piece glass modules cover 12 PV modules that are analyzed, including EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules

According to ISO 14025,
EN 50693:2019/AC:2021

XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG. The full list of the modules under analysis is shown in table 1 below.

Table 1. Different PV module products models

SERIES (BRAND NAME)	POWER OUTPUT RANGE(W)	DIMENSIONS(MM*MM)	MODULE EFFICIENCY (%)
EG-XXXM54-HLV	400~415	1722*1134*30	21.25
EG-XXXM54-HL/BF-DG	400~415	1722*1134*30	21.25
EG-XXXM72-HLV	530~550	2278*1134*30	21.29
EG-XXXM72-HL/BF-DG	530~550	2278*1134*30	21.29
EG-XXXM60-HUV	585~605	2172*1303*35	21.37
EG-XXXM60-HU/BF-DG	585~605	2172*1303*33	21.37
EG-XXXM66-HUV	650~670	2384*1303*35	21.56
EG-XXXM66-HU/BF-DG	650~670	2384*1303*33	21.56
EG-XXXNT54-HLV	420~440	1722*1134*30	22.53
EG-XXXNT54-HL/BF-DG	420~440	1722*1134*30	22.53
EG-XXXNT72-HLV	560~580	2278*1134*30	22.45
EG-XXXNT72-HL/BF-DG	560~580	2278*1134*30	22.45
EG-XXXNT66-HU/BF-DG	700~730	2384*1303*33	23.5
EG-XXXNT48-HRC/BF-DG	440~460	1762*1134*30	23
EG-XXXNT66-HRC/BF-DG	610~630	2382*1134*30	23.3

1.3. Application

EGing Solar PV modules are widely used to generate electricity on ultra-large ground power station.

1.4. Declaration of Methodological Framework

In this project, a full LCA approach was considered with some simplification on data modeling using generic data for most background systems. The EPD analysis uses a cradle-to-grave system boundary. No known flows are deliberately excluded from this EPD.

To calculate the LCA results for the product maintenance stage, a 30-year reference service life (RSL) was assumed for the declared products.

Additional details on assumptions, cut-offs and allocation procedures can be found in section 2.3\ 2.4\ 2.8 respectively.

1.5. Technical Requirements

The chart below lists all standards required for EGing solar's PV modules

ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

Table 2. Standards required for EGING solar's PV modules

PRODUCT	STANDARDS
EG-XXXM54-HLV	IEC 61215, IEC 61730, ISO50001, IECQ QC 080000 ISO9001:2015: ISO Quality Management System ISO14001:2015: ISO Environment Management System ISO45001:2018: Occupational Health and Safety IEC 62941:2019: Guideline for module design qualification and type approval
EG-XXXM54-HL/BF-DG	
EG-XXXM72-HLV	
EG-XXXM72-HL/BF-DG	
EG-XXXM60-HUV	
EG-XXXM60-HU/BF-DG	
EG-XXXM66-HUV	
EG-XXXM66-HU/BF-DG	
EG-XXXNT54-HLV	
EG-XXXNT54-HL/BF-DG	
EG-XXXNT72-HLV	
EG-XXXNT72-HL/BF-DG	
EG-XXXNT66-HU/BF-DG	
EG-XXXNT48-HRC/BF-DG	
EG-XXXNT66-HRC/BF-DG	

1.6. Material Composition

Table 3 contains a list of materials and substances in different modules.

Table 3. Components in different modules

MATERIALS	MAIN SUBSTANCE	UNITS	EG-XXXM54-HLV	EG-XXXM54-HL/BF-DG	EG-XXXM72-HLV	EG-XXXM72-HL/BF-DG	EG-XXXM60-HUV	EG-XXXM60-HU/BF-DG	EG-XXXM66-HUV	EG-XXXM66-HU/BF-DG
Cell	Single-crystal silicon	kg/pcs	0.61	0.61	0.81	0.81	0.84	0.84	0.93	0.93
Solar glass	SiO2	kg/pcs	15.49	9.68	11.48	7.17	22.47	14.05	24.67	15.42
EVA	EVA	kg/pcs	1.70	1.85	2.20	1.15	2.69	1.30	2.95	1.40
POE	POE	kg/pcs	/	/	/	1.17	/	1.29	/	1.43
Back sheet	FPF	kg/pcs	0.85	/	1.15	/	1.02	/	1.12	/
Frame	Al	kg/pcs	2.22	2.22	2.54	2.40	2.89	2.88	3.01	3.04
Interconnection bar	Cu	kg/pcs	0.11	0.11	0.15	0.14	0.17	0.17	0.16	0.18
Bus bar	Cu	kg/pcs	0.040	0.041	0.040	0.041	0.036	0.038	0.037	0.037
Junction box	PP	kg/pcs	0.10	0.10	0.12	0.10	0.10	0.12	0.10	0.12
Flux for soldering	Flux	kg/pcs	0.0082	0.012	0.017	0.0092	0.010	0.0089	0.0092	0.0096
Silica gel	SiO2	kg/pcs	0.28	0.013	0.29	0.28	0.29	0.28	0.30	0.28
Potting adhesive	PU	kg/pcs	0.025	0.040	0.024	0.024	0.024	0.024	0.026	0.025



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

Packing film	PE	kg/pcs	0.013	0.012	0.014	0.011	0.011	0.011	0.013	0.010
Packaging strip	Steel	kg/pcs	0.042	0.050	0.048	0.046	0.052	0.047	0.065	0.054
Paper corner	Paper	kg/pcs	0.0089	0.0072	0.0117	0.0086	0.0084	0.0086	0.0080	0.0086
Paper box	Corrugated paper	kg/pcs	0.25	0.23	0.27	0.27	0.33	0.31	0.33	0.38
Wooden pallet	Plywood	kg/pcs	0.63	0.63	0.79	0.79	0.75	0.75	1.10	1.10

Table 3. Components in different modules(continued)

MATERIALS	MAIN SUBSTANCE	UNITS	EG-XXXNT54-HLV	EG-XXXNT54-HL/BF-DG	EG-XXXNT54-HL/BF-DG	EG-XXXNT72-HLV	EG-XXXNT72-HL/BF-DG	EG-XXXNT66-HU/BF-DG	EG-XXXNT48-HRC/BF-DG	EG-XXXNT66-HRC/BF-DG
Cell	Single-crystal silicon	kg/pcs	0.60	0.60	0.60	0.80	0.80	0.833	0.539	0.741
Solar glass	SiO2	kg/pcs	15.49	9.68	9.68	20.50	12.81	30.84	15.85	26.80
EVA	EVA	kg/pcs	2.02	1.85	1.85	1.09	2.46	0.974	0.621	0.84
POE	POE	kg/pcs	/	/	/	0.98	/	0.974	0.621	0.84
Back sheet	FPF	kg/pcs	0.70	/	/	1.18	/	/	/	/
Frame	Al	kg/pcs	2.22	2.05	2.05	2.56	2.45	2.76	1.8	2.27
Interconnection bar	Cu	kg/pcs	0.14	0.14	0.14	0.18	0.18	0.224	0.145	0.199
Bus bar	Cu	kg/pcs	0.031	0.032	0.032	0.041	0.03	0.036	0.032	0.032
Junction box	PP	kg/pcs	0.10	0.10	0.10	0.10	0.10	0.11	0.11	0.11
Flux for soldering	Flux	kg/pcs	0.011	0.011	0.011	0.014	0.014	0.023	0.015	0.021
Silica gel	SiO2	kg/pcs	0.28	0.22	0.22	0.27	0.27	0.301	0.257	0.30
Potting adhesive	PU	kg/pcs	0.025	0.025	0.025	0.025	0.024	0.013	0.013	0.013
Packing film	PE	kg/pcs	0.018	0.011	0.011	0.0092	0.012	0.013	0.011	0.011
Packaging strip	Steel	kg/pcs	0.048	0.056	0.056	0.042	0.052	0.061	0.049	0.070
Paper corner	Paper	kg/pcs	0.0086	0.0086	0.0086	0.0076	0.009	0.009	0.008	0.008
Paper box	Corrugated paper	kg/pcs	0.25	0.25	0.25	0.27	0.27	0.349	0.239	0.269
Wooden pallet	Plywood	kg/pcs	0.63	0.63	0.63	0.79	0.79	0.84	0.603	0.736

2. Life Cycle Assessment Background Information

2.1. Functional Unit

In this report, the functional unit is defined as 1 kWh of electricity generated as output from the solar photovoltaic plant, as determined by the PCR.

2.2. System Boundary



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

The system boundary of this evaluation is cradle-to-grave. Figure 2 below illustrates the system boundaries for the EGING Solar product, including raw material production and transportation, manufacture, delivery, solar plant installation and waste disposal.

According to the PCR, the life cycle stage must refer to segmentation in the following three processes:

Upstream Stage for module: which includes extraction and processing of raw materials (A1), transportation of the raw material to the factory (A2);

Core Stage for module: which includes all the relevant processes managed by the Organization proposing the EPD. The core stage in this study includes manufacturing of solar cells and PV modules (A3) with the supply of the energy and water input, and gaseous emissions, wastewater and solid wastes; distribution of PV modules to solar PV plant (A4); construction of the solar plant (A5), the use (B1), maintenance (B2), repair (B3), replacement (B4), refurbishment (B5) and the operational energy use (B6) and water use (B7) during the RSL (30 years) period; disassembled and demolition of the solar plant (C1), transport to waste processing (C2). However, considering that the installation and operation is beyond the control of EGING, therefore the construction of the solar plant (A5) base on the data from Ecoinvent database value.

Downstream Stage for module: which includes waste processing (C3) and disposal (C4). Dissipation related to voltage drop operations before feeding electricity into the grid, and environmental impacts of using booster station. According to the PCR, the benefit and avoided loads beyond the product system boundary are not reported in module D separately within this study, neither will the benefit and loads be reported in other stages by following a cut off allocation approach.

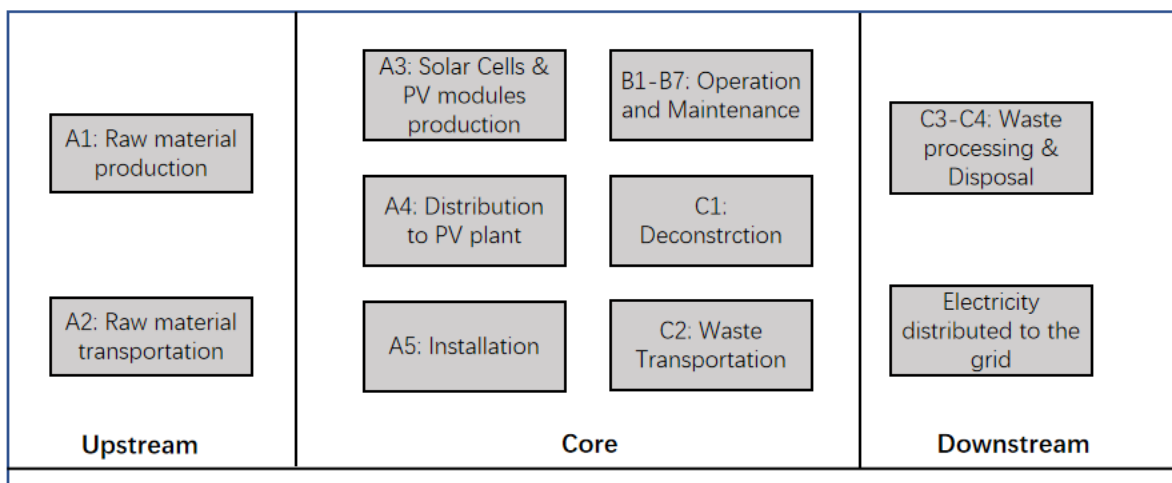


Figure 2. System boundary of PV modules

2.3. Estimates and Assumptions

In order to carry out the LCA study, the following main assumptions were made:

- All products are modeled using the same assumptions.
- The transportation distance of some raw material suppliers not provided by EGING is estimated according to the average transportation distance of 445 km in China Statistical Yearbook 2024
- For missing background data, substitution of missing data using similar background data approach was taken to shorten the gap.

ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

- The number of PV module employed in PV plant construction (A5) was calculated by dividing the peak power of the PV plant (570kWp) by the peak power output of each PV module;
- The electricity consumption during PV plant construction stage is scaled up based on the data from Ecoinvent database value (36.03 kWh/570kWp) according to the power capacity;
- Electricity used during the PV plant operation is assumed to be powered by the plant itself, water used for cleaning the PV panels is assumed 0.23L (source: www.polywater.com) per module per time and two times per year.
- Materials consumption during PV plants construction is scaled up based on the data from Ecoinvent database value according to the power capacity. Secondary data from Ecoinvent 3.11 (market for photovoltaic plant construction, 570kWp, multi-Si, on open ground GLO);
- The electricity consumption during deconstruction of PV plant (C1) is assumed same to the electricity consumption of construction stage (A5), and electricity consumption for PV module demolition at waste processing stage (C3) is assumed same to the electricity consumption of PV module assembling;
- During the end of life stage, the transportation of the waste PV modules and other equipment from the solar PV plant to treatment facilities including recycling, landfill or incineration center is assumed to be 100 km for simplification purposes.

2.4. Cut-off Criteria

The following procedure was followed for the exclusion of inputs and outputs:

- All inputs and outputs to a (unit) process will be included in the calculation for which data is available. Data gaps may be filled by conservative assumptions with average or generic data. Any assumptions for such choices will be documented;
- In case of insufficient input data or data gaps for a unit process, according to the PCR requirement, the cut-off criteria chosen is 2% of the total mass and energy of that unit process. (respectively, of the photovoltaic module's unit weight and the energy needed to produce and assemble it). The neglected flow is demonstrated in table 4.

Table 4. Cut off flows

FLOW NAME	PROCESS STAGE	MASS%	REASON TO CUT OFF
Production, use, and disposal of the packaging of components and semi-finished intermediates;	Upstream	<0.1%	Specified in PCR
Transportation of waste from the A3 production phase	Core stream	N/A	Transportation distances of around 100km and very small quantities of waste
Inspection during operation of solar plant	B	N/A	Cut off due to small impact according to PCR
Total cut off mass % estimated		<1%	<1%

2.5. Reference Service Life

Reference Service life is assumed to be 30 years based on EPDItaly014 PCR.

2.6. Data Sources

In this EPD, both primary and secondary data are used. Site specific foreground data have been provided by EGing. Main data sources are the bill of materials available on the enterprise resource planning. For all processes for which

ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

primary are not available, generic data originating from the Ecoinvent v3.11 database, allocation cut-off by classification, are used.

2.7. Data Quality

The data quality requirements for this study were as follows:

- Foreground data of the considered system: such as materials or energy flows that enter the production system. These data were directly extracted from ERP or calculated and submitted by EGing.
- Technological representativeness: For the most part, data is representative of the actual technologies used for processing, transportation, and manufacturing operations. Representative fabrication datasets, specific to the type of material, are used to represent the actual processes, as appropriate.
- Geographical representativeness: Background data may be global data. LCI data linked to the geographical locations of the processes, such as electricity and transport data from China and Global, were used.
- Time-related representativeness: The most recent available data are used, based on other considerations such as data quality and similarity to the actual operations. Typically, these LCI data are less than 2 years old (typically 2024). Manufacturer-supplied data (primary data) are based on annualized production.
- Completeness: The LCA model included all known mass and energy flows for production of these PV modules. No known processes or activities contributing to more than 1% of the total environmental impact for each indicator are excluded.
- Precision/uncertainty: Data collected for operations were typically averaged for one year, which is expected to reduce the variability of results.
- Methodological appropriateness and consistency: The consistency of the assessment is considered to be high. Different portions of the product life cycle are equally considered; however, it must be noted that final disposition of the product is based on assumptions of current practices in Italy.

2.8. Allocation

Allocation refers to partitioning of input or output flows of a process or a product system between the product systems under study and one or more other product systems. In this study, there are three types of allocation procedures considered:

Multi-input processes

For data sets in this study, the allocation of the inputs from coupled processes is generally carried out via the mass. The consumption of raw materials is allocated by mass ratio. The transportation of raw materials is allocated by mass ratio.

Multi-output processes

In the production of PV modules, the total consumption of energy and water during manufacturing is equally allocated to per unit mass. No other by products are produced from the production, hence there is no production of by products that need to be used to allocate the situation.

Allocation for recovery processes

The model used for the allocation for recovery processes is the Ecoinvent cut-off system model (Allocation, cut-off by classification). According to this approach, wastes are the producer's responsibility, and there is an obligation to use recyclable products, that are available burden-free (cut-off). The underlying philosophy of this approach is that primary (first)

ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

production of materials is always allocated to the primary user of a material. If a material is recycled, the primary producer does not receive any credit for the provision of any recyclable materials. Consequently, recyclable materials are available burden-free for recycling processes, and secondary (recycled) materials bear only the impacts of the recycling processes.

During the end of life stage of the solar plant, the extra benefit of recycling the waste modules as well as other equipment is cut off from the boundary, following the PCR's recommendation on end of life scenario. Along with the benefit, the load from waste treatment for recycling purpose such as de-pollution and crushing, etc is also allocated to the next life cycle of substituted products, but not the primary producers of PV module, hence no burden or benefit will be allocated to the primary producer of the PV module or solar PV plant (cut off approach).

2.9. Comparability

No comparisons or benchmarking are included in this EPD. LCA results across EPDs can be calculated with different background databases, modeling assumptions, geographic scope and time periods, all of which are valid and acceptable according to the Product Category Rules (PCR) and ISO standards. The user of the EPD should take care when comparing EPDs from different companies. Assumptions, data sources, and assessment tools may all impact the uncertainty of the final results and make comparisons misleading.

2.10. Electricity power mix

In this EPD, different electricity mix data is taken where the process takes place. For the production of PV modules, it takes place in Jiangsu, so China East Grid electricity (market for electricity, medium voltage) in Ecoinvent 3.11 database is adopted. For PV roof construction and operation, it takes place at Italy, 'market for electricity medium voltage Italy' in Ecoinvent 3.11 database is adopted.

3. Life Cycle Assessment Scenarios

3.1. Manufacturing

The PV module products under study includes one series covering 15 models (see Table 1). All the products share similar manufacturing processes and life cycle stages. A flowchart depicting the production process stages of EGing PV module products is shown in Figure 2 below. For simplification purpose, only main stages of manufacturing are presented, raw material, auxiliary processes considered in the LCA but not shown in the flowcharts, which include:

- Raw and auxiliary material production and transportation;
- Energy consumption;
- Tap water consumption;
- Waste (including transport to waste treatment plant);

ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

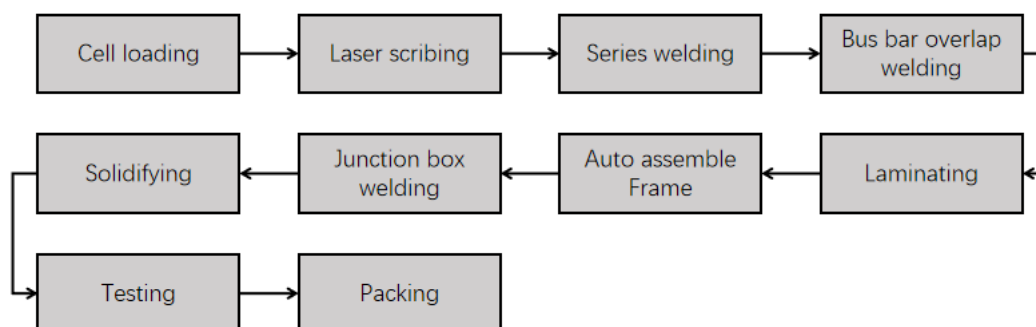


Figure 3. Production Process Flow Diagram

The raw materials are mainly sourced from Jiangsu Province & Zhejiang Province & Sichuan Province in China and delivered by lorry. Transportation information for individual raw materials and components is detailed in the LCA report.

3.2. Packaging

There are four main kinds of packaging materials: Paper board/Paper (corner protector, box, top cover, bottom cover); PE (Wrap film); PET(Packaging strip); Wood (Pallet). Package composition can be found in the Table 3.

3.3. Transportation

According to EGING, the production site is in No. 18, Jinwu Road, Yaotang Town, Jintan District, Changzhou City, Jiangsu Province, P.R. China. After the PV module is manufactured, these modules are assumed transported from the production plant in China to Italy. As it was not possible to define specific distances, justified estimates and web map service according to the agency's locations provided by EGING were used, see the table 5 below for detailed transport information.

Table 4. Transport to the building site (A4)

COUNTRY OF SALE	SEE TRANSPORT DISTANCE (KM)	VEHICLE TYPE	ROAD TRANSPORT DISTANCE (KM)	VEHICLE TYPE
Italy	9000	Transoceanic Ship	220 (From the factory gate to the harbor)	Diesel lorry

3.4. Product Installation

After the PV modules are manufactured, the PV modules and other materials, such as brackets, cables, and inverters, are transported to the installation site. During the construction process, construction materials such as concrete and tape are used, and electricity is mainly consumed during the construction process. Since, the construction of PV plants is already very mature, the activity data involved in the construction can be borrowed from background database. Therefore, all installation data concerning the solar PV plant are based on data from the Ecoinvent 3.11 database values, and the assumed installation sites provide only nominal solar irradiance data, as well as the installed capacity, with all the PV modules installation site assumed to be Italy. The detailed information about the PV plant is listed in Table 6.



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

Table 6. PV plant information

PARAMETERS	VALUE		SOURCE
	Amount	Unit	
Peak power of the plant	570	KW	Ecoinvent
Plant latitude and longitude	41.89°N 12.51°E	°	EGing
Plant altitude	280	m	EGing
Nominal solar irradiance	1685400	Wh/m2/year	EGing

3.5. Use and maintenance

The energy produced by a photovoltaic module depends on the installed power peak [Wp] and the module efficiency, the latter decreases with time, due to performance changes during lifespan according to degradation rate. Linear annual degradation was assumed over reference service life (RSL). The table below presents the aggregate power output from power plants to the grid during RSL, based on EGing's simulation results utilizing Pvsyst software.

Table 7. Energy production over Reference service life

SERIES (BRAND NAME)	PEAK POWER (kW)	REFERENCE SERVICE LIFE ELECTRICITY GENERATION (kWh)	REMARKS ON CALCULATIONS
EG-XXXM54-HLV	0.415	16728	PERC modules attenuate 2% in the first year and 0.55% annually
EG-XXXM54-HL/BF-DG	0.415	17564	
EG-XXXM72-HLV	0.55	22050	
EG-XXXM72-HL/BF-DG	0.55	23153	
EG-XXXM60-HUV	0.605	24272	
EG-XXXM60-HU/BF-DG	0.605	25485	
EG-XXXM66-HUV	0.67	27188	
EG-XXXM66-HU/BF-DG	0.67	28548	TOP Con modules decay 1% in the first year and 0.4% annually
EG-XXXNT54-HLV	0.44	18380	
EG-XXXNT54-HL/BF-DG	0.44	19299	
EG-XXXNT72-HLV	0.58	24781	
EG-XXXNT72-HL/BF-DG	0.58	26020	
EG-XXXNT66-HU/BF-DG	0.73	31836	
EG-XXXNT48-HRC/BF-DG	0.46	20203	
EG-XXXNT66-HRC/BF-DG	0.63	27793	

As water used for cleaning the PV panels is assumed 0.23L per module per time and two times per year, over reference service life (RSL) the water consumption is 13.8L

3.6. Disposal

For the end-of-life stage, disassembled (C1) of the PV plant during the disposal stage is assumed only consumes electricity, and the electricity consumption is assumed the same as the construction stage (A5), 100km transportation distance from plant site to waste treatment site (C2) is assumed, electricity used for PV module demolition during waste processing stage is assumed the same as PV module manufacturing stage (A3). For end of life disposal treatment

ENVIRONMENTAL PRODUCT DECLARATION



股票代码: 600537

EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

process (C4), the disposal of other components including inverters is regarded as 100% recyclable and following the end of life load and benefit allocation approach, is then cut off from the analysis. Since there is lack of existing data of recycling rate for PV module, this study refers to legal requirements issued by Waste Electrical and Electronic Equipment (WEEE). In 2012/19/EU-Article 11 & ANNEX V, the required recycling rate for waste PV module is 85%. Therefore, 15% of waste PV module end up with waste disposal, waste management scenario of 20% landfill and 80% incineration was adopted.

4. Life Cycle Assessment Results

Table 8. Description of the system boundary modules

	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
	Raw material supply	Transport	Manufacturing	Transport from gate to site	Assembly/Install	Use	Maintenance	Repair	Replacement	Refurbishment	Building Operational Energy Use During Product Use	Building Operational Water Use During Product Use	Deconstruction	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling Potential
EPD Type	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	ND

4.1. Cycle

Life

Impact Assessment Results-Core environmental impact indicators

Based on the model of PV module products, the EN 15804 result is calculated and the tables below shows the results. Note that impact results are calculated based on 1 kWh electricity generated by the PV plant. The results have been demonstrated through different processes according to the PCR, namely upstream, core, and downstream processes.

Table 9. Core Environmental Impact Category Indicators Assessment Results - EG-XXXM54-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	4.56E-05	1.53E-05	3.02E-05	1.48E-07
Climate change -total	kg CO ₂ eq	2.13E-02	9.19E-03	1.15E-02	5.55E-04
Climate change -biogenic	kg CO ₂ eq	3.09E-05	1.02E-05	1.25E-05	8.17E-06
Climate change -fossil	kg CO ₂ eq	2.10E-02	9.15E-03	1.13E-02	5.48E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	2.44E-01	1.15E-01	1.25E-01	4.53E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	6.11E-07	1.21E-07	4.87E-07	3.02E-09
Eutrophication aquatic freshwater	kg P eq	1.02E-05	3.80E-06	6.28E-06	1.55E-07
Photochemical ozone formation	Kg NMVOC eq	8.24E-05	3.23E-05	4.92E-05	9.47E-07
Acidification	mol H ⁺ eq	1.59E-04	5.53E-05	1.02E-04	1.20E-06



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

Ozone Depletion	Kg CFC 11 _{eq}	1.41E-09	1.31E-09	9.23E-11	1.02E-11
Water use	m ³ world _{eq.} deprived	1.62E-02	1.20E-02	4.05E-03	1.32E-04

Table 10. Core Environmental Impact Category Indicators Assessment Results - EG-XXXM54-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ _{eq}	4.23E-05	1.35E-05	2.87E-05	1.07E-07
Climate change -total	kg CO ₂ _{eq}	1.89E-02	7.57E-03	1.09E-02	4.11E-04
Climate change -biogenic	kg CO ₂ _{eq}	2.45E-05	5.78E-06	1.10E-05	7.68E-06
Climate change -fossil	kg CO ₂ _{eq}	1.87E-02	7.54E-03	1.07E-02	4.04E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	2.20E-01	9.82E-02	1.18E-01	3.73E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb _{eq}	5.07E-07	1.04E-07	4.63E-07	2.57E-09
Eutrophication aquatic freshwater	kg P _{eq}	9.44E-06	3.35E-06	5.98E-06	1.15E-07
Photochemical ozone formation	Kg NMVOC _{eq}	7.35E-05	2.68E-05	4.60E-05	7.47E-07
Acidification	mol H ⁺ _{eq}	1.43E-04	4.57E-05	9.62E-05	9.74E-07
Ozone Depletion	Kg CFC 11 _{eq}	2.40E-10	1.45E-10	8.72E-11	7.93E-12
Water use	m ³ world _{eq.} deprived	1.50E-02	1.10E-02	3.86E-03	1.15E-04

Table 11. Core Environmental Impact Category Indicators Assessment Results- EG-XXXM72-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ _{eq}	4.49E-05	1.45E-05	3.02E-05	1.10E-07
Climate change -total	kg CO ₂ _{eq}	2.05E-02	8.56E-03	1.15E-02	4.25E-04
Climate change -biogenic	kg CO ₂ _{eq}	2.75E-05	1.09E-05	8.48E-06	8.10E-06
Climate change -fossil	kg CO ₂ _{eq}	2.02E-02	8.51E-03	1.13E-02	4.18E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	2.36E-01	1.08E-01	1.24E-01	3.89E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb _{eq}	6.01E-07	1.10E-07	4.88E-07	2.69E-09
Eutrophication aquatic freshwater	kg P _{eq}	1.01E-05	3.67E-06	6.30E-06	1.19E-07
Photochemical ozone formation	Kg NMVOC _{eq}	7.80E-05	2.89E-05	4.84E-05	7.78E-07
Acidification	mol H ⁺ _{eq}	1.52E-04	4.94E-05	1.01E-04	1.02E-06
Ozone Depletion	Kg CFC 11 _{eq}	1.16E-09	1.06E-09	9.17E-11	8.24E-12
Water use	m ³ world _{eq.} deprived	1.62E-02	1.20E-02	4.06E-03	1.21E-04

Table 12. Core Environmental Impact Category Indicators Assessment Results- EG-XXXM72-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ _{eq}	4.20E-05	1.32E-05	2.88E-05	8.35E-08
Climate change -total	kg CO ₂ _{eq}	1.84E-02	7.17E-03	1.09E-02	3.32E-04
Climate change -biogenic	kg CO ₂ _{eq}	2.08E-05	5.32E-06	7.80E-06	7.65E-06
Climate change -fossil	kg CO ₂ _{eq}	1.82E-02	7.13E-03	1.07E-02	3.25E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	2.15E-01	9.40E-02	1.18E-01	3.35E-03



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules

According to ISO 14025,
EN 50693:2019/AC:2021

Depletion of abiotic resources--minerals and metals ²	kg Sb _{eq}	5.64E-07	9.62E-08	4.65E-07	2.37E-09
Eutrophication aquatic freshwater	kg P _{eq}	9.36E-06	3.27E-06	6.00E-06	9.29E-08
Photochemical ozone formation	Kg NMVOC _{eq}	7.10E-05	2.48E-05	4.55E-05	6.45E-07
Acidification	mol H ⁺ _{eq}	1.39E-04	4.26E-05	9.57E-05	8.60E-07
Ozone Depletion	Kg CFC 11 _{eq}	1.07E-09	9.74E-10	8.69E-11	6.73E-12
Water use	m ³ world _{eq.} deprived	1.51E-02	1.11E-02	3.87E-03	1.09E-04

Table 13. Core Environmental Impact Category Indicators Assessment Results- EG-XXXM60-HUV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ _{eq}	4.46E-05	1.43E-05	3.01E-05	1.46E-07
Climate change -total	kg CO ₂ _{eq}	2.07E-02	8.68E-03	1.15E-02	5.50E-04
Climate change -biogenic	kg CO ₂ _{eq}	3.13E-05	1.77E-05	5.36E-06	8.21E-06
Climate change -fossil	kg CO ₂ _{eq}	2.05E-02	8.64E-03	1.13E-02	5.42E-04
Depletion of abiotic resources-fossil fuels ²	MJ, net calorific value	2.39E-01	1.10E-01	1.24E-01	4.51E-03
Depletion of abiotic resources--minerals and metals ²	kg Sb _{eq}	6.02E-07	1.13E-07	4.86E-07	3.02E-09
Eutrophication aquatic freshwater	kg P _{eq}	1.00E-05	3.58E-06	6.27E-06	1.53E-07
Photochemical ozone formation	Kg NMVOC _{eq}	8.07E-05	3.06E-05	4.91E-05	9.41E-07
Acidification	mol H ⁺ _{eq}	2.72E-04	9.82E-05	1.72E-04	2.46E-06
Ozone Depletion	Kg CFC 11 _{eq}	1.55E-04	5.23E-05	1.02E-04	1.20E-06
Water use	m ³ world _{eq.} deprived	1.57E-02	1.15E-02	4.05E-03	1.32E-04

Table 14. Core Environmental Impact Category Indicators Assessment Results- EG-XXXM60-HU/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ _{eq}	4.19E-05	1.31E-05	2.87E-05	1.06E-07
Climate change -total	kg CO ₂ _{eq}	1.86E-02	7.31E-03	1.09E-02	4.09E-04
Climate change -biogenic	kg CO ₂ _{eq}	2.41E-05	1.19E-05	4.49E-06	7.72E-06
Climate change -fossil	kg CO ₂ _{eq}	1.84E-02	7.27E-03	1.07E-02	4.01E-04
Depletion of abiotic resources-fossil fuels ²	MJ, net calorific value	2.17E-01	9.51E-02	1.18E-01	3.73E-03
Depletion of abiotic resources--minerals and metals ²	kg Sb _{eq}	5.66E-07	1.01E-07	4.63E-07	2.57E-09
Eutrophication aquatic freshwater	kg P _{eq}	9.32E-06	3.23E-06	5.97E-06	1.14E-07
Photochemical ozone formation	Kg NMVOC _{eq}	7.27E-05	2.60E-05	4.59E-05	7.45E-07
Acidification	mol H ⁺ _{eq}	1.42E-04	4.49E-05	9.60E-05	9.73E-07
Ozone Depletion	Kg CFC 11 _{eq}	9.72E-10	8.78E-10	8.70E-11	7.90E-12
Water use	m ³ world _{eq.} deprived	1.47E-02	1.07E-02	3.85E-03	1.16E-04

Table 15. Core Environmental Impact Category Indicators Assessment Results- EG-XXXM66-HUV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ _{eq}	4.35E-05	1.38E-05	2.95E-05	1.43E-07
Climate change -total	kg CO ₂ _{eq}	2.03E-02	8.43E-03	1.13E-02	5.38E-04



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules

According to ISO 14025,
EN 50693:2019/AC:2021

Climate change -biogenic	kg CO ₂ eq	2.32E-05	2.80E-06	1.23E-05	8.12E-06
Climate change -fossil	kg CO ₂ eq	2.00E-02	8.40E-03	1.11E-02	5.30E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	2.33E-01	1.07E-01	1.22E-01	4.43E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.81E-07	1.02E-07	4.76E-07	2.97E-09
Eutrophication aquatic freshwater	kg P eq	9.73E-06	3.44E-06	6.15E-06	1.50E-07
Photochemical ozone formation	Kg NMVOC eq	7.88E-05	2.97E-05	4.81E-05	9.23E-07
Acidification	mol H ⁺ eq	1.51E-04	5.03E-05	9.99E-05	1.18E-06
Ozone Depletion	Kg CFC 11 eq	1.00E-09	9.02E-10	9.02E-11	9.95E-12
Water use	m ³ world eq. deprived	1.54E-02	1.13E-02	3.97E-03	1.30E-04

Table 16. Core Environmental Impact Category Indicators Assessment Results- EG-XXXM66-HU/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	4.10E-05	1.28E-05	2.81E-05	1.03E-07
Climate change -total	kg CO ₂ eq	1.82E-02	7.11E-03	1.07E-02	4.00E-04
Climate change -biogenic	kg CO ₂ eq	1.67E-05	-3.46E-06	1.25E-05	7.64E-06
Climate change -fossil	kg CO ₂ eq	1.80E-02	7.09E-03	1.05E-02	3.93E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	2.12E-01	9.28E-02	1.16E-01	3.67E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.51E-07	9.46E-08	4.54E-07	2.54E-09
Eutrophication aquatic freshwater	kg P eq	9.10E-06	3.13E-06	5.85E-06	1.12E-07
Photochemical ozone formation	Kg NMVOC eq	7.11E-05	2.54E-05	4.50E-05	7.32E-07
Acidification	mol H ⁺ eq	1.39E-04	4.35E-05	9.41E-05	9.56E-07
Ozone Depletion	Kg CFC 11 eq	8.99E-10	8.06E-10	8.52E-11	7.76E-12
Water use	m ³ world eq. deprived	1.44E-02	1.05E-02	3.77E-03	1.14E-04

Table 17. Core Environmental Impact Category Indicators Assessment Results - EG-XXXNT54-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	4.14E-05	1.38E-05	2.75E-05	1.37E-07
Climate change -total	kg CO ₂ eq	1.93E-02	8.26E-03	1.05E-02	5.17E-04
Climate change -biogenic	kg CO ₂ eq	2.80E-05	8.45E-06	1.18E-05	7.83E-06
Climate change -fossil	kg CO ₂ eq	1.91E-02	8.22E-03	1.03E-02	5.09E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	2.23E-01	1.05E-01	1.14E-01	4.27E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.64E-07	1.18E-07	4.43E-07	2.86E-09
Eutrophication aquatic freshwater	kg P eq	9.33E-06	3.47E-06	5.72E-06	1.44E-07
Photochemical ozone formation	Kg NMVOC eq	7.51E-05	2.93E-05	4.49E-05	8.88E-07
Acidification	mol H ⁺ eq	1.45E-04	5.05E-05	9.31E-05	1.13E-06
Ozone Depletion	Kg CFC 11 eq	1.29E-09	1.20E-9	8.41E-11	9.56E-12
Water use	m ³ world eq. deprived	1.46E-02	1.08E-02	3.69E-03	1.26E-04

Table 18. Core Environmental Impact Category Indicators Assessment Results - EG-XXXNT54-HL/BF-DG



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules

According to ISO 14025,
EN 50693:2019/AC:2021

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	3.83E-05	1.21E-05	2.61E-05	9.87E-08
Climate change -total	kg CO ₂ eq	1.71E-02	6.79E-03	9.96E-03	3.82E-04
Climate change -biogenic	kg CO ₂ eq	2.23E-05	3.72E-06	1.12E-05	7.37E-06
Climate change -fossil	kg CO ₂ eq	1.69E-02	6.76E-03	9.80E-03	3.76E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	1.99E-01	8.82E-02	1.08E-01	3.52E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.26E-07	1.02E-07	4.22E-07	2.44E-09
Eutrophication aquatic freshwater	kg P eq	8.60E-06	3.05E-06	5.44E-06	1.07E-07
Photochemical ozone formation	Kg NMVOC eq	6.67E-05	2.41E-05	4.19E-05	7.01E-07
Acidification	mol H ⁺ eq	1.30E-04	4.15E-05	8.76E-05	9.17E-07
Ozone Depletion	Kg CFC 11 eq	1.00E-09	9.14E-10	7.94E-11	7.43E-12
Water use	m ³ world eq. deprived	1.36E-02	9.98E-03	3.51E-03	1.10E-04

Table 19. Core Environmental Impact Category Indicators Assessment Results - EG-XXXNT72-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	4.05E-05	1.34E-05	2.69E-05	1.32E-07
Climate change -total	kg CO ₂ eq	1.89E-02	8.08E-03	1.03E-02	4.97E-04
Climate change -biogenic	kg CO ₂ eq	2.58E-05	1.11E-05	6.99E-06	7.69E-06
Climate change -fossil	kg CO ₂ eq	1.87E-02	8.04E-03	1.01E-02	4.90E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	2.17E-01	1.01E-01	1.11E-01	4.14E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.54E-07	1.17E-07	4.35E-07	2.78E-09
Eutrophication aquatic freshwater	kg P eq	9.16E-06	3.41E-06	5.61E-06	1.39E-07
Photochemical ozone formation	Kg NMVOC eq	7.33E-05	2.85E-05	4.40E-05	8.58E-07
Acidification	mol H ⁺ eq	1.42E-04	4.99E-05	9.12E-05	1.10E-06
Ozone Depletion	Kg CFC 11 eq	9.70E-10	8.78E-10	8.24E-11	9.23E-12
Water use	m ³ world eq. deprived	1.45E-02	1.07E-02	3.62E-03	1.22E-04

Table 20. Core Environmental Impact Category Indicators Assessment Results - EG-XXXNT72-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	3.72E-05	1.15E-05	2.56E-05	9.59E-08
Climate change -total	kg CO ₂ eq	1.67E-02	6.56E-03	9.77E-03	3.72E-04
Climate change -biogenic	kg CO ₂ eq	2.17E-05	7.43E-06	7.04E-06	7.24E-06
Climate change -fossil	kg CO ₂ eq	1.65E-02	6.53E-03	9.61E-03	3.65E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	1.94E-01	8.55E-02	1.06E-01	3.44E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.13E-07	9.71E-08	4.14E-07	2.39E-09
Eutrophication aquatic freshwater	kg P eq	8.40E-06	2.96E-06	5.34E-06	1.04E-07
Photochemical ozone formation	Kg NMVOC eq	6.50E-05	2.32E-05	4.11E-05	6.85E-07
Acidification	mol H ⁺ eq	1.27E-04	3.99E-05	8.59E-05	8.96E-07
Ozone Depletion	Kg CFC 11 eq	9.24E-10	8.38E-10	7.78E-11	7.24E-12



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

Water use	m ³ world eq. deprived	1.34E-02	9.82E-03	3.45E-03	1.07E-04
-----------	-----------------------------------	----------	----------	----------	----------

Table 21. Core Environmental Impact Category Indicators Assessment Results - EG-XXXNT66-HU/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	3.58E-05	1.06E-05	2.52E-05	1.23E-07
Climate change -total	kg CO ₂ eq	1.63E-02	6.31E-03	9.55E-03	4.51E-04
Climate change -biogenic	kg CO ₂ eq	1.84E-05	8.04E-06	5.55E-06	4.81E-06
Climate change -fossil	kg CO ₂ eq	1.61E-02	6.28E-03	9.39E-03	4.46E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	1.87E-01	8.02E-02	1.03E-01	3.26E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.08E-07	9.94E-08	4.07E-07	2.08E-09
Eutrophication aquatic freshwater	kg P eq	8.05E-06	2.69E-06	5.23E-06	1.25E-07
Photochemical ozone formation	Kg NMVOC eq	6.56E-05	2.39E-05	4.10E-05	7.17E-07
Acidification	mol H ⁺ eq	1.28E-04	4.19E-05	8.51E-05	8.85E-07
Ozone Depletion	Kg CFC 11 eq	8.51E-10	7.66E-10	7.71E-11	7.90E-12
Water use	m ³ world eq. deprived	1.20E-02	8.57E-03	3.73E-03	8.81E-05

Table 22. Core Environmental Impact Category Indicators Assessment Results - EG-XXXNT48-HR/cBF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	3.63E-05	1.07E-05	2.55E-05	1.09E-07
Climate change -total	kg CO ₂ eq	1.63E-02	6.22E-03	9.66E-03	4.03E-04
Climate change -biogenic	kg CO ₂ eq	1.63E-05	2.46E-06	8.86E-06	4.95E-06
Climate change -fossil	kg CO ₂ eq	1.61E-02	6.20E-03	9.50E-03	3.98E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	1.87E-01	7.96E-02	1.04E-01	3.06E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.18E-07	1.03E-07	4.12E-07	2.00E-09
Eutrophication aquatic freshwater	kg P eq	8.17E-06	2.75E-06	5.30E-06	1.12E-07
Photochemical ozone formation	Kg NMVOC eq	6.50E-05	2.32E-05	4.12E-05	6.60E-07
Acidification	mol H ⁺ eq	1.27E-04	4.09E-05	8.57E-05	8.24E-07
Ozone Depletion	Kg CFC 11 eq	1.09E-09	1.00E-09	7.79E-11	7.20E-12
Water use	m ³ world eq. deprived	1.22E-02	8.70E-03	3.42E-03	8.57E-05

Table 23. Core Environmental Impact Category Indicators Assessment Results - EG-XXXNT66-HR/cBF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
Climate change - land use and land use change	kg CO ₂ eq	3.57E-05	1.05E-05	2.51E-05	1.23E-07
Climate change -total	kg CO ₂ eq	1.63E-02	6.33E-03	9.51E-03	4.52E-04
Climate change -biogenic	kg CO ₂ eq	1.93E-05	9.19E-06	5.18E-06	4.88E-06
Climate change -fossil	kg CO ₂ eq	1.61E-02	6.29E-03	9.36E-03	4.47E-04
Depletion of abiotic recourses-fossil fuels ²	MJ, net calorific value	1.87E-01	8.05E-02	1.03E-01	3.28E-03
Depletion of abiotic recourses--minerals and metals ²	kg Sb eq	5.07E-07	1.00E-07	4.05E-07	2.10E-09



ENVIRONMENTAL PRODUCT DECLARATION



股票代码: 600537

EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

Eutrophication aquatic freshwater	kg P _{eq}	8.05E-06	2.71E-06	5.21E-06	1.26E-07
Photochemical ozone formation	Kg NMVOC _{eq}	6.55E-05	2.39E-05	4.09E-05	7.20E-07
Acidification	mol H ⁺ _{eq}	1.28E-04	4.19E-05	8.48E-05	8.90E-07
Ozone Depletion	Kg CFC 11 _{eq}	9.46E-10	8.62E-10	7.68E-11	7.93E-12
Water use	m ³ world _{eq.} deprived	1.22E-02	8.71E-03	3.36E-03	8.89E-05

4.2. Life Cycle Inventory Results

Table 24. Resource Use- EG-XXXM54-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ, LHV	2.36E-01	1.10E-01	1.24E-01	1.91E-03
PERE	MJ, LHV	3.57E-02	2.15E-02	1.30E-02	1.18E-03
PENRM	MJ, LHV	8.38E-03	5.42E-03	3.51E-04	2.61E-03
PERM	MJ, LHV	1.17E-03	6.49E-04	5.24E-04	0.00E-00
PENRT	MJ, LHV	2.44E-01	1.15E-01	1.25E-01	4.53E-03
PERT	MJ, LHV	3.69E-02	2.22E-02	1.36E-02	1.18E-03
FW	m ³	3.80E-04	2.82E-04	9.46E-05	2.95E-06
SM	kg	4.51E-04	5.16E-05	3.98E-04	1.21E-06
RSF	MJ, LHV	5.01E-06	2.57E-06	2.42E-06	1.67E-08
NRSF	MJ, LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 25. Resource Use- EG-XXXM54-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.14E-01	9.40E-02	1.81E-01	2.02E-03
PERE	MJ,LHV	3.31E-02	1.95E-02	1.24E-02	1.10E-03
PENRM	MJ,LHV	6.24E-03	4.20E-03	3.26E-04	1.70E-03
PERM	MJ,LHV	1.08E-03	5.97E-04	4.87E-04	0.00E-00
PENRT	MJ,LHV	2.20E-01	9.82E-02	1.18E-01	3.73E-03
PERT	MJ,LHV	3.41E-02	2.01E-02	1.29E-02	1.10E-03
FW	m ³	3.51E-04	2.59E-04	9.00E-05	2.59E-06
SM	kg	4.25E-04	4.51E-05	3.79E-04	9.74E-07
RSF	MJ,LHV	4.36E- 06	2.04E-06	2.31E-06	1.26E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 26. Resource Use- EG-XXXM72-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.29E-01	1.03E-01	1.24E-01	2.15E-03
PERE	MJ,LHV	3.54E-02	2.12E-02	1.31E-02	1.16E-03
PENRM	MJ,LHV	7.37E-03	5.31E-03	3.18E-04	1.74E-03
PERM	MJ,LHV	1.06E-03	5.88E-04	4.74E-04	0.00E-00



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

PENRT	MJ,LHV	2.36E-01	1.08E-01	1.24E-01	3.89E-03
PERT	MJ,LHV	3.65E-02	2.18E-02	1.36E-02	1.16E-03
FW	m ³	3.78E-04	2.81E-04	9.47E-05	2.72E-06
SM	kg	4.45E-04	4.49E-05	3.99E-04	1.02E-06
RSF	MJ,LHV	4.41E-06	1.96E-06	2.43E-06	1.31E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 27. Resource Use- EG-XXXM72-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.10E-01	9.06E-02	1.18E-01	2.17E-03
PERE	MJ,LHV	3.31E-02	1.95E-02	1.25E-02	1.09E-03
PENRM	MJ,LHV	4.96E-03	3.49E-03	3.00E-04	1.17E-03
PERM	MJ,LHV	1.01E-03	5.58E-04	4.48E-04	0.00E-00
PENRT	MJ,LHV	2.15E-01	9.41E-02	1.18E-01	3.35E-03
PERT	MJ,LHV	3.41E-02	2.00E-02	1.29E-02	1.09E-03
FW	m ³	3.53E-04	2.61E-04	9.01E-05	2.46E-06
SM	kg	4.21E-04	4.01E-05	3.80E-04	8.59E-07
RSF	MJ,LHV	4.69E-06	2.37E-06	2.31E-06	1.04E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 28. Resource Use- EG-XXXM60-HUV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.30E-01	1.04E-01	1.24E-01	1.94E-03
PERE	MJ,LHV	3.46E-02	2.03E-02	1.31E-02	1.19E-03
PENRM	MJ,LHV	8.24E-03	5.38E-03	2.91E-04	2.57E-03
PERM	MJ,LHV	9.72E-04	5.39E-04	4.33E-04	0.00E-00
PENRT	MJ,LHV	2.39E-01	1.10E-01	1.24E-01	4.51E-03
PERT	MJ,LHV	3.56E-02	2.09E-02	1.35E-02	1.19E-03
FW	m ³	3.66E-04	2.69E-04	9.42E-05	2.95E-06
SM	kg	4.46E-04	4.71E-05	3.97E-04	1.20E-06
RSF	MJ,LHV	4.77E-06	2.33E-06	2.42E-06	1.66E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 29. Resource Use- EG-XXXM60-HU/BF-DG



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.11E-01	9.16E-02	1.18E-01	2.04E-03
PERE	MJ,LHV	3.24E-02	1.88E-02	1.25E-02	1.11E-03
PENRM	MJ,LHV	5.48E-03	3.52E-03	2.72E-04	1.68E-03
PERM	MJ,LHV	9.09E-04	5.04E-04	4.04E-04	0.00E-00
PENRT	MJ,LHV	2.17E-01	9.51E-02	1.18E-01	3.73E-03
PERT	MJ,LHV	3.33E-03	1.93E-02	1.29E-02	1.11E-03
FW	m ³	3.43E-04	2.50E-04	8.97E-05	2.60E-06
SM	kg	4.22E-04	4.23E-05	3.78E-04	9.73E-07
RSF	MJ,LHV	4.88E-06	2.57E-06	2.30E-06	1.25E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 30. Resource Use- EG-XXXM66-HUV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.25E-01	1.01E-01	1.22E-01	1.93E-03
PERE	MJ,LHV	3.40E-02	2.01E-02	1.28E-02	1.18E-03
PENRM	MJ,LHV	8.12E-03	5.28E-03	3.44E-04	2.50E-03
PERM	MJ,LHV	1.15E-03	6.38E-04	5.14E-04	0.00E-00
PENRT	MJ,LHV	2.33E-01	1.07E-01	1.22E-01	4.43E-03
PERT	MJ,LHV	3.51E-02	2.07E-02	1.33E-02	1.18E-03
FW	m ³	3.59E-04	2.63E-04	9.23E-05	2.91E-06
SM	kg	4.35E-04	4.42E-05	3.89E-04	1.18E-06
RSF	MJ,LHV	4.56E-06	2.18E-06	2.37E-06	1.62E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 31. Resource Use- EG-XXXM66-HU/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.07E-01	8.94E-02	1.15E-01	2.03E-03
PERE	MJ,LHV	3.18E-02	1.86E-02	1.21E-02	1.10E-03
PENRM	MJ,LHV	5.40E-03	3.43E-03	3.34E-04	1.63E-03
PERM	MJ,LHV	1.13E-03	6.27E-04	4.99E-04	0.00E-00
PENRT	MJ,LHV	2.12E-01	9.28E-02	1.16E-01	3.67E-03
PERT	MJ,LHV	3.29E-02	1.92E-02	1.26E-02	1.10E-03
FW	m ³	3.36E-04	2.45E-04	8.79E-05	2.57E-06
SM	kg	4.13E-04	4.17E-05	3.71E-04	9.56E-07
RSF	MJ,LHV	4.93E-06	2.66E-06	2.26E-06	1.23E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 32. Resource Use- EG-XXXNT54-HLV



ENVIRONMENTAL PRODUCT DECLARATION



股票代码: 600537

EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.14E-01	9.92E-02	1.13E-01	1.87E-03
PERE	MJ,LHV	3.24E-02	1.94E-02	1.19E-02	1.13E-03
PENRM	MJ,LHV	8.09E-03	5.37E-03	3.23E-04	2.40E-03
PERM	MJ,LHV	1.07E-03	5.91E-04	4.82E-04	0.00E-00
PENRT	MJ,LHV	2.23E-01	1.05E-01	1.14E-01	4.27E-03
PERT	MJ,LHV	3.34E-02	1.99E-02	1.23E-02	1.13E-03
FW	m ³	3.43E-04	2.54E-04	8.62E-05	2.80E-06
SM	kg	4.11E-04	3.73E-05	3.62E-04	1.13E-06
RSF	MJ,LHV	4.57E-06	2.35E-06	2.21E-06	1.56E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 33. Resource Use- EG-XXXNT54-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	1.94E-01	8.43E-02	1.07E-01	1.96E-03
PERE	MJ,LHV	2.99E-02	1.76E-02	1.13E-02	1.06E-03
PENRM	MJ,LHV	5.76E-03	3.90E-03	3.08E-04	1.55E-03
PERM	MJ,LHV	1.02E-03	5.63E-04	4.60E-04	0.00E-00
PENRT	MJ,LHV	1.99E-01	8.82E-02	1.08E-01	3.52E-03
PERT	MJ,LHV	3.09E-02	1.81E-02	1.18E-02	1.06E-03
FW	m ³	3.18E-04	2.34E-04	8.20E-05	2.47E-06
SM	kg	3.87E-04	4.12E-05	3.45E-04	9.17E-07
RSF	MJ,LHV	4.13E-06	2.02E-06	2.10E-06	1.18E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 34. Resource Use- EG-XXXNT72-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	2.10E-01	9.72E-02	1.11E-01	1.85E-03
PERE	MJ,LHV	3.19E-02	1.91E-02	1.17E-02	1.11E-03
PENRM	MJ,LHV	6.66E-03	4.10E-03	2.79E-04	2.28E-03
PERM	MJ,LHV	9.36E-04	5.21E-04	4.16E-04	0.00E-00
PENRT	MJ,LHV	2.17E-01	1.01E-01	1.11E-01	4.14E-03
PERT	MJ,LHV	3.28E-02	1.96E-02	1.21E-02	1.11E-03
FW	m ³	3.38E-04	2.51E-04	8.44E-05	2.73E-06
SM	kg	3.99E-04	4.23E-05	3.55E-04	1.10E-06
RSF	MJ,LHV	4.65E+06	2.47E-06	2.16E-06	1.50E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 35. Resource Use- EG-XXXNT72-HL/BF-DG



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	1.89E-01	8.17E-02	1.05E-01	1.94E-03
PERE	MJ,LHV	2.93E-02	1.72E-02	1.11E-02	1.04E-03
PENRM	MJ,LHV	5.54E-03	3.77E-03	2.69E-04	1.50E-03
PERM	MJ,LHV	8.97E-04	4.96E-04	4.01E-04	0.00E-00
PENRT	MJ,LHV	1.95E-01	8.55E-02	1.06E-01	3.44E-03
PERT	MJ,LHV	3.02E-02	1.77E-02	1.15E-02	1.04E-03
FW	m ³	3.13E-04	2.30E-04	8.03E-05	2.42E-06
SM	kg	3.76E+04	3.67E-05	3.38E-04	8.96E-07
RSF	MJ,LHV	3.75E+06	1.68E-06	2.06E-06	1.14E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 36. Resource Use- EG-XXXNT66-HU/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	1.82E-01	7.80E-02	1.03E-01	8.78E-04
PERE	MJ,LHV	2.68E-02	1.52E-02	1.09E-02	7.07E-04
PENRM	MJ,LHV	4.83E-03	2.20E-03	2.54E-04	2.38E-03
PERM	MJ,LHV	8.24E-04	4.56E-04	3.68E-04	0.00E-00
PENRT	MJ,LHV	1.87E-01	8.02E-02	1.03E-01	3.26E-03
PERT	MJ,LHV	2.76E-02	1.56E-02	1.13E-02	7.07E-04
FW	m ³	2.81E-04	2.01E-04	7.85E-05	1.93E-06
SM	kg	3.70E-04	3.64E-05	3.33E-04	8.88E-07
RSF	MJ,LHV	4.44E-06	2.40E-06	2.03E-06	1.33E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 37. Resource Use- EG-XXXNT48-HR/cBF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	1.82E-01	7.72E-02	1.04E-01	1.03E-03
PERE	MJ,LHV	2.72E-02	1.54E-02	1.11E-02	7.23E-04
PENRM	MJ,LHV	4.66E-03	2.33E-03	2.91E-04	2.03E-03
PERM	MJ,LHV	9.23E-04	5.09E-04	4.14E-04	0.00E-00
PENRT	MJ,LHV	1.87E-01	7.96E-02	1.04E-01	3.06E-03
PERT	MJ,LHV	2.82E-02	1.60E-02	1.15E-02	7.23E-04
FW	m ³	2.86E-04	2.04E-04	7.98E-05	1.89E-06
SM	kg	3.75E-04	3.74E-05	3.37E-04	8.27E-07
RSF	MJ,LHV	4.47E-06	2.40E-06	2.05E-06	1.20E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 38. Resource Use- EG-XXXNT66-HR/cBF-DG



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules

According to ISO 14025,
EN 50693:2019/AC:2021

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
PENRE	MJ,LHV	1.82E-01	7.83E-02	1.03E-01	9.00E-04
PERE	MJ,LHV	2.70E-02	1.53E-02	1.09E-02	7.17E-04
PENRM	MJ,LHV	4.84E-03	2.21E-03	2.52E-04	2.37E-03
PERM	MJ,LHV	8.03E-04	4.41E-04	3.62E-04	0.00E-00
PENRT	MJ,LHV	1.87E-01	8.05E-02	1.03E-01	3.28E-03
PERT	MJ,LHV	2.78E-02	1.58E-02	1.13E-02	7.17E-04
FW	m ³	2.84E-04	2.04E-04	7.83E-05	1.95E-06
SM	kg	3.67E-04	3.50E-05	3.31E-04	8.93E-07
RSF	MJ,LHV	4.29E-06	2.25E-06	2.02E-06	1.33E-08
NRSF	MJ,LHV	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Acronyms: LHV PENRE = Use of non-renewable primary energy excluding nonrenewable primary energy resources used as raw material; PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw material; PENRM = Use of non-renewable primary energy resources used as raw material; PERM = Use of renewable primary energy resources used as raw material; PENRT = Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); PERT = Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); FW = Net use of fresh water; SM = Use of secondary materials; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; LVH=Lower Heating value

Table 39. Output Flows and Waste Categories- EG-XXXM54-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.75E-03	1.12E-03	2.58E-03	4.14E-05
NHWD	kg	5.02E-02	1.91E-02	3.06E-02	5.22E-04
RWD	kg	3.01E-07	1.73E-07	1.22E-07	6.94E-09
MER	kg	4.63E-08	1.35E-08	3.26E-08	2.18E-10
MFR	kg	1.32E-03	1.59E-05	1.31E-03	6.57E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.30E-04	5.33E-05	6.25E-05	1.39E-05

Table 40. Output Flows and Waste Categories- EG-XXXM54-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.51E-03	1.02E-03	2.46E-03	2.87E-05
NHWD	kg	4.64E-02	1.68E-02	2.91E-02	4.11E-04
RWD	kg	2.71E-07	1.49E-07	1.16E-07	6.24E-09
MER	kg	4.17E-08	1.05E-08	3.10E-08	1.59E-10
MFR	kg	1.26E-03	1.44E-05	1.25E-03	6.10E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.16E-04	4.37E-05	5.59E-05	1.31E-05

Table 41. Output Flows and Waste Categories- EG-XXXM72-HLV



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.70E-03	1.08E-03	2.59E-03	2.94E-05
NHWD	kg	4.94E-02	1.83E-02	3.07E-02	4.27E-04
RWD	kg	2.98E-07	1.70E-07	1.22E-07	6.56E-09
MER	kg	4.44E-08	1.16E-08	3.27E-08	1.64E-10
MFR	kg	1.33E-03	1.44E-05	1.31E-03	6.42E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.28E-04	5.16E-05	6.27E-05	1.39E-05

Table 42. Output Flows and Waste Categories- EG-XXXM72-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.46E-03	9.75E-04	2.47E-03	2.14E-05
NHWD	kg	4.60E-02	1.65E-02	2.92E-02	3.53E-04
RWD	kg	2.72E-07	1.50E-07	1.16E-07	6.02E-09
MER	kg	4.21E-08	1.08E-08	3.11E-08	1.26E-10
MFR	kg	1.26E-03	1.30E-05	1.25E-03	6.02E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.17E-04	4.46E-05	5.97E-05	1.31E-05

Table 43. Output Flows and Waste Categories- EG-XXXM60-HUV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.68E-03	1.06E-03	2.58E-03	4.08E-05
NHWD	kg	4.90E-02	1.80E-02	3.06E-02	5.19E-04
RWD	kg	2.92E-07	1.63E-07	1.22E-07	6.96E-09
MER	kg	4.56E-08	1.28E-08	3.26E-08	2.15E-10
MFR	kg	1.32E-03	1.45E-05	1.31E-03	6.60E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.27E-04	5.01E-05	6.25E-05	1.40E-05

Table 44. Output Flows and Waste Categories- EG-XXXM60-HU/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.45E-03	9.68E-04	2.46E-03	2.84E-05
NHWD	kg	4.59E-02	1.64E-02	2.91E-02	4.10E-04
RWD	kg	2.68E-07	1.46E-07	1.16E-07	6.26E-09
MER	kg	4.28E-08	1.16E-08	3.10E-08	1.58E-10



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

MFR	kg	1.26E-03	1.35E-05	1.24E-03	6.13E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.17E-04	4.40E-05	5.94E-05	1.32E-05

Table 45. Output Flows and Waste Categories- EG-XXXM66-HUV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.59E-03	1.02E-03	2.53E-03	3.99E-05
NHWD	kg	4.78E-02	1.73E-02	3.00E-02	5.09E-04
RWD	kg	2.85E-07	1.59E-07	1.19E-07	6.87E-09
MER	kg	4.46E+08	1.24E-08	3.19E-08	2.11E-10
MFR	kg	1.29E-03	1.36E-05	1.28E-03	6.53E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.24E-04	4.89E-05	6.12E-05	1.39E-05

Table 46. Output Flows and Waste Categories- EG-XXXM66-HU/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.38E-03	9.40E-04	2.41E-03	2.77E-05
NHWD	kg	4.48E-02	1.59E-02	2.85E-02	4.02E-04
RWD	kg	2.63E-07	1.43E-07	1.14E-07	6.19E-09
MER	kg	4.20E-08	1.14E-08	3.04E-08	154E-10
MFR	kg	1.23E-03	1.31E-05	1.22E-03	6.06E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.14E-04	4.30E-05	5.82E-05	1.31E-05

Table 47. Output Flows and Waste Categories- EG-XXXNT54-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.41E-03	1.02E-03	2.35E-03	3.83E-05
NHWD	kg	4.58E-02	1.74E-02	2.79E-02	4.89E-04
RWD	kg	2.72E-07	1.54E-07	1.11E-07	6.61E-09
MER	kg	4.21E-08	1.22E-08	2.97E-08	2.02E-10
MFR	kg	1.21E-03	1.46E-05	1.19E-03	6.29E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.18E-04	4.47E-05	5.69E-05	1.34E-05

Table 48. Output Flows and Waste Categories- EG-XXXNT54-HL/BF-DG



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.17E-03	9.06E-04	2.24E-03	2.64E-05
NHWD	kg	4.21E-02	1.52E-02	2.65E-02	3.85E-04
RWD	kg	2.46E-07	1.34E-07	1.06E-07	5.95E-09
MER	kg	3.80E-08	9.63E-09	2.83E-08	1.47E-10
MFR	kg	1.15E-03	1.30E-05	1.13E-03	5.84E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.06E-04	3.92E-05	5.42E-05	1.26E-05

Table 49. Output Flows and Waste Categories-EG-XXXNT72-HLV

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.32E-03	9.75E-04	2.31E-03	3.66E-05
NHWD	kg	4.50E-02	1.72E-02	2.73E-02	4.73E-04
RWD	kg	2.71E-07	1.55E-07	1.09E-07	6.47E-09
MER	kg	4.23E-08	1.30E-08	2.91E-08	1.94E-10
MFR	kg	1.18E-03	1.34E-05	1.17E-03	6.17E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.18E+04	4.87E-05	5.58E-05	1.31E-05

Table 50. Output Flows and Waste Categories- EG-XXXNT72-HL/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.09E-03	8.71E-04	2.20E-03	2.56E-05
NHWD	kg	4.11E-02	1.47E-02	2.60E-02	3.76E-04
RWD	kg	2.41E-07	1.31E-07	1.04E-07	5.84E-09
MER	kg	3.71E-08	9.24E-09	2.77E-08	1.43E-10
MFR	kg	1.12E-03	1.19E-05	1.11E-03	5.47E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	1.04E-04	3.82E-05	5.31E-05	1.24E-05

Table 51. Output Flows and Waste Categories- EG-XXXNT66-HU/BF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	2.96E-03	7.75E-04	2.15E-03	3.59E-05
NHWD	kg	3.95E-02	1.36E-02	2.55E-02	3.97E-04
RWD	kg	2.21E-07	1.18E-07	9.90E-08	4.41E-09
MER	kg	3.86E-08	1.12E-08	2.72E-08	1.80E-10
MFR	kg	1.10E-03	1.12E-05	1.09E-03	3.97E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG, EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG, EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	9.63E-05	3.59E-05	5.23E-05	8.19E-06

Table 52. Output Flows and Waste Categories-EG-XXXNT48-HR/cBF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	3.00E-03	7.89E-04	2.18E-03	3.13E-05
NHWD	kg	4.00E-02	1.38E-02	2.59E-02	3.64E-04
RWD	kg	2.24E-07	1.19E-07	1.00E-07	4.38E-09
MER	kg	3.84E-08	1.06E-08	2.76E-08	1.60E-10
MFR	kg	1.12E-03	1.16E-05	1.11E-03	4.04E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	9.74E-05	3.60E-05	5.30E-05	8.45E-06

Table 53. Output Flows and Waste Categories- EG-XXXNT66-HR/cBF-DG

INDICATOR	UNIT	TOTAL	UPSTREAM	CORE STREAM	DOWNSTREAM
HWD	kg	2.95E-03	7.75E-04	2.14E-03	3.59E-05
NHWD	kg	3.94E-02	1.36E-02	2.54E-02	3.99E-04
RWD	kg	2.22E-07	1.19E-07	9.87E-08	4.46E-09
MER	kg	3.84E-08	1.11E-08	2.71E-08	1.80E-10
MFR	kg	1.10E-03	1.09E-05	1.09E-03	4.02E-07
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	MJ	9.65E-05	3.62E-05	5.21E-05	8.31E-06

Acronyms: HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; MER = Materials for energy recovery; MFR = Material for recycling; CRU = Components for reuse; ETE = Exported thermal energy; EEE = Exported electricity energy

5. LCA Interpretation

The contribution analysis of the PV module products on core LCIA reveals that PV module including raw components production stage and PV plant construction stage are the main contributions to environmental impact categories.

In terms of upstream stage, cell and aluminum bezel are two key influencing components, and in the core stage of PV plant construction, the copper cable and inverters used for PV plant infrastructure are the two key influencing components.

For ADP minerals & metals this indicator is largely due to the use of various metal components (e.g., copper, aluminum, steel, etc.) in PV plant infrastructure, resulting in the vast majority of the contribution from the Core stage.

The LCA study has been carried out based on available information, regional and global database and experience to achieve more accuracy, completeness and representative of the results. The production stage data in this study are derived from the most recent ERP data, and due to the allocation principle, the LCA results can represent the company's average level of similar products.



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

6. Additional Environmental Information

Clean Solar Energy

EGing has always been committed to the research, development and promotion of high-efficiency photovoltaic products, making significant contributions to the global dual-carbon goal. We strive to use the clean solar energy to promote energy transformation. We are committed to systematically addressing the issues of economic development, environmental protection and energy security and providing the clean solar energy to the public. We not only conduct our operation in a responsible manner, but also contribute to meet the rising demand for clean energy by establishing Product Stewardship Policy, technological innovations, efficiency improvement, so as to actively respond to global climate change.

Sustainable Use of Water Resource

EGing regards protecting water resource as one of its important tasks, and strives to reduce the consumption of water resource per MW module production through sustainable use of water resource. Solar module production consumes a lot of water. To carry out water conservation management, we setup water saving goals for each workshops and implemented various of water saving projects, such as reuse of RO (Reverse Osmosis) rejected water, treat and reuse of wastewater, collection of condensated water from air conditioning system etc. We setup a strict maintenance scheme to clean RO membrane to increase DI(De-ionized) water yield. With business expanding, total amount of water consumption is in increasing trend. But as we continue to develop and implement water conservation projects, our water use efficiency continues to increase.

Certifications

Plants of EGing comply with the following standards:

- ISO 9001-Quality Management System
- ISO 14001- Environmental Management System
- ISO 50001- Energy Management System
- ISO14064 - Organization Level for Quantification and Reporting of Greenhouse Gas Emission and Removals
- ISO 45001: Occupational Health and Safety Management System
- IECQ QC 080000:2017 Hazardous Substances Management System

More information

Additional information about EGing Solar's products can be found on the website: <https://www.egingpv.com/>

7. References

- 1) ISO 14067:2018 Carbon footprint of products —Requirements and guidelines for quantification and communication
- 2) ISO 14040:2006 Environmental management — Life cycle assessment —Principles and Framework
- 3) ISO 14044:2006 Environmental management- Life cycle assessment Principles and guidelines
- 4) EN 15804:2012+A2:2019/AC:2021 Sustainability of construction works – Environmental product declarations - Core rules for the product category of construction products
- 5) EN 50693:2019 Product category rules for life cycle assessments of electronic and electrical products and systems



ENVIRONMENTAL PRODUCT DECLARATION



EG-XXXM54-HLV, EG-XXXM54-HL/BF-DG, EG-XXXM72-HLV, EG-XXXM72-HL/BF-DG,
EG-XXXM60-HUV, EG-XXXM60-HU/BF-DG, EG-XXXM66-HUV, EG-XXXM66-HU/BF-DG,
EG-XXXNT54-HLV, EG-XXXNT54-HL/BF-DG, EG-XXXNT72-HLV, EG-XXXNT72-HL/BF-
DG, EG-XXXNT66-HU/BF-DG, EG-XXXNT48-HRC/BF-DG, EG-XXXNT66-HRC/BF-DG
Photovoltaic modules



According to ISO 14025,
EN 50693:2019/AC:2021

- 6) PCR EPDItaly014: Electricity Produced by Photovoltaic Modules.
- 7) ISO 14025: ISO14025:2011-10, Environmental labels and declarations - Type III environmental declarations - Principles and procedures.
- 8) www.polywater.com: Water Consumption in PV Panel Cleaning.
- 9) GB 50797-2012 Design specification for photovoltaic power station.

