

CITTERIO S.p.A.



ENVIRONMENTAL PRODUCT DECLARATION

Product Name:
3x3m Wood Wall / solid
3x3m Wood Wall / double glass
3x3m Wood Wall / single glass
3x3m Wood Wall / lateral single
glass

Manufacturing Plant:
Via Don Giuseppe Brambilla 16/18 I
23844, Sirone (LC), Italy

CITTERIO

In compliance with ISO 14025 e EN 15804:2012+A2/AC:2021

Program Operator	EPDIItaly
Publisher	EPDIItaly
Declaration Number	EPDWW001
Registration Number	EPDITALY0456
UNCPC Code	3160
Issue Date	18.07.2023
Valid until	18.07.2028

www.epditaly.it

GENERAL INFORMATION

EPD REFERENCES	
EPD OWNER	Citterio S.p.A. Via Don Giuseppe Brambilla 16/18 I 23844, Sirone (LC), Italy.
REFERENCE PRODUCTION SITE	Via Don Giuseppe Brambilla 16/18 I 23844, Sirone (LC), Italy.
PROGRAM OPERATOR	EPDIItaly Via Gaetano De Castillia 10, 20124 Milano (MI), Italia www.epditaly.it
INDEPENDENT VERIFICATION	This declaration was developed following the general instructions of the EPDIItaly programme. Independent verification of the declaration and data carried out according to ISO 14025:2010. <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External Third party verification performed by: ICMQ SpA, via De Castillia, 10 - 20124 Milano (www.icmq.it). Accredited by Accredia.
SCOPE OF APPLICATION	The following is an EPD developed by LCA-Tool referring to 4 products of the Wood Wall family of dimensions 3x3m: Wood Wall Solid, Wood Wall Double Glass, Wood Wall Single Glass, Wood Wall Lateral Single Glass.
UNCPC CODE	3160: Builders' joinery and carpentry of wood (including cellular wood panels, assembled parquet panels, shingles and shakes).
REFERENCE DOCUMENTS	This declaration was developed following the EPDIItaly Programme Regulation rev. 5.2 published on 16/02/2022, available at www.epditaly.it . The EN 15804:2012+A2:2019 standard represent the framework reference for the core PCR " EPDIItaly001-15 - Rev 3 Construction Products and Services. Issue date: 02/12/2019"
PCR	CORE-PCR EPDIItaly001-15 - Rev 3 Construction Products and Services. Issue date: 02/12/2019
COMPARABILITY	Environmental Declarations published within the same product category, but from different programmes, may not be comparable. In particular, EPDs of similar products may not be comparable if they do not comply with the reference technical standard.
RESPONSIBILITY	CITTERIO S.p.A. releases EPDIItaly from any non-compliance with environmental legislation self-declared by the manufacturer. The holder of the declaration shall be responsible for the supporting information and evidence; EPDIItaly declines all responsibility for the manufacturer's information, data and results of the life cycle assessment.
TOOL	-
ORGANIZATION CONTACT	Dott.ssa Laura Camerin – Citterio S.p.A. – Via Don Giuseppe Brambilla 16/18 I 23844, Sirone (LC), Italy. laura.camerin@citteriospa.com
TECHNICAL CONTACT	Federica Gilardelli, Chiara Albini, LCA studio managers, Greenwich S.r.l. Head office: Via Presolana 2/4, 24030, Medolago (BG) – Registered office: Via Vittorio Emanuele II, 179, 24033 Calusco d'Adda - Bergamo. info@greenwichsrl.it



COMPANY INFORMATION

Citterio Spa was founded in 1958 in the province of Lecco and is a leader in the Italian and foreign markets for the production of high-quality office furniture. It is part of the Molteni Group, one of Italy's largest industrial furniture groups, together with Molteni & C, Dada and Unifor.

Citterio supplies the Italian and foreign markets with a wide range of office furniture solutions: wooden partitions, glass partitions, storage units, operative and executive furniture systems, mobile partitions. The Sirone plant in Italy houses Citterio's technical and commercial management offices, showroom and production units. Research, innovation and production flexibility have always been at the heart of the company's approach, so much so that in 2010 it presented the first C_SS acoustic box for meetings, which paved the way for a series of product collections designed to guarantee well-being and optimal acoustic performance in working environments.

Citterio has always animated the dialogue between partition walls and office furniture. The company combines and transforms traditional wood craftsmanship and industrial production processes. Each project stems from the ideas of Italian designers who translate needs and functions into innovative, high-performance products. Each product is the result of the expert hands of skilled workers who treat wood, glass and aluminium with unique expertise. Every single collection is selected by designers from all over the world to furnish workspaces inspired by the logic of high functionality, comfort, technological flexibility and aesthetic quality.

PRODUCT AND PRODUCTION PROCESS DESCRIPTION

Wood Wall

The subjects of the present EPD are 4 product codes that are part of the Wood Wall family. Wood Wall is an office partition wall where wood is the primary and distinguishing feature. Wood Wall is the synthesis of a new approach through which Citterio proposes a different way of setting up the working environment, it is the expression of a process of rediscovery of natural materials and their essence.

Wood Wall / solid

The partition made with wood panels with a composite structure that ensures perfect continuity with the glass modules, through a recessed junction.

Wood_Wall has been tested in the laboratory according to the following international standards UNI EN ISO 10140-1:2016 - UNI EN ISO 10140-2:2010 - UNI EN ISO 171-1:2013

The test results available is $R_w (C;Ctr) = 24 (-0;-1) \text{ dB}$

Wood Wall / double glass

The double glass partition with remarkable acoustic characteristics. A transparent barrier that allows the compartmentalization of the most private spaces.

Wood_Wall stratified double glass 5+5 has been tested in the laboratory according to the following international standards UNI EN ISO 10140-1:2016 - UNI EN ISO 10140-2:2010 - UNI EN ISO 171-1:2013

The test results available is $R_w (C;Ctr) = 38 (-1;-3) \text{ dB}$

Wood_Wall stratified double glass 5+52A Stadip Silence has been tested in the laboratory according to the following international standards UNI EN ISO 10140-1:2016 - UNI EN ISO 10140-2:2010 - UNI

EN ISO 171-1:2013

The test results available is $R_w (C;Ctr) = 40 (-1;-4)$ dB

There is also available specific test according UNI 10880:2000 for Impact Test.

For better acoustic performance, it is also possible to use 6+6 or 6+62A laminated glass with interposed acoustic film.

Wood Wall / single glass

Wood_Wall single glass is available with two different types of laminated glass:

Wood_Wall stratified single glass 5+5 has been tested in the laboratory according to the following international standards UNI EN ISO 10140-1:2016 - UNI EN ISO 10140-2:2010 - UNI EN ISO 171-1:2013

The test results available is $R_w (C;Ctr) = 34 (-1;-2)$ dB

Wood_Wall stratified single glass 5+52A Stadip Silence has been tested in the laboratory according to the following international standards UNI EN ISO 10140-1:2016 - UNI EN ISO 10140-2:2010 - UNI EN ISO 171-1:2013

The test results available is $R_w(C;Ctr) = 37 (-1;-3)$ dB


For better acoustic performance, it is also possible to use 6+6 or 6+62A laminated glass with interposed acoustic film.

Wood Wall / lateral single glass

The asymmetric wall which creates different depths effects of profiles to the variation of the observation side. The acoustic performance are similar to the central single glass.

For all four versions of the Wood_Wall wall, there are specific acoustic tests for the doors, in particular for standard doors, for acoustic doors without door closer and for acoustic door with door closer.

Test reports are available upon specific request to the company.

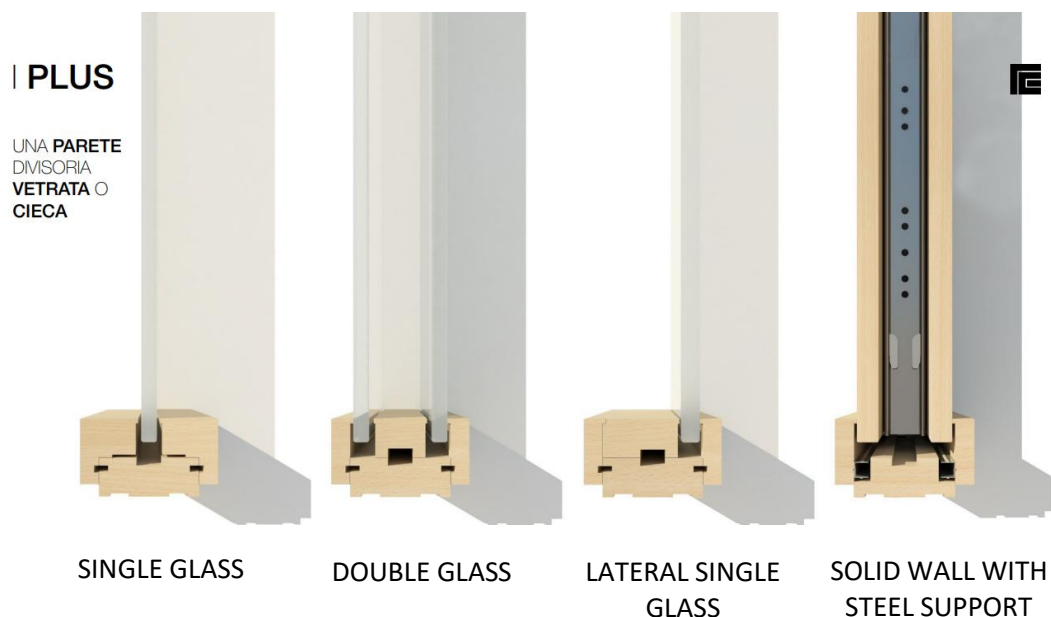

The bill of materials and the net weight of the components of the WW walls analysed are presented below.

<i>Component</i>	<i>WW / solid (kg)</i>	<i>WW / double glass (kg)</i>	<i>WW / single glass (kg)</i>	<i>WW /lateral single glass (kg)</i>
Glass, laminated	-	464,67	232,20	232,20
Particleboard	113,38	-	-	-
EPDM	36,19	0,14	0,14	0,14
Galvanised steel, profiles	32,43	-	-	-
Hardwood	13,80	23,52	26,88	26,93
Polyester	9,89	-	-	-
Coating	8,90	1,77	1,37	1,86
Aluminium, profiles	4,76	-	-	-
Galvanised steel, hardware	2,65	0,29	0,19	0,29
Polycarbonate	-	1,20	0,30	-
Galvanised steel, screws	1,70	0,49	0,59	0,66
Aluminium, hardware	0,74	0,89	0,43	0,77
Steel, hardware	0,67	0,08	0,22	0,02
Polyurethane foam	-	0,19	0,19	0,10
ABS	-	0,05	-	0,02
Total	191,23	493,29	262,52	263,30

SCOPE AND TYPE OF EPD

This is a product-specific declaration of type “cradle-to-gate with modules C1-C4 and module D, as set out in EN 15804:2012+A2:2019. Thus, the following phases were considered:

- A1-A3 Product stage: raw material extraction and processing, transport to the manufacturer and manufacturing of the finished product;
- C1-C4 End-of-life Stage (dismantling; collection & transport; end-of-life treatments).

Production			Construction		Use							End of life				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X

Table 1: X = included in the LCA, MND = the module is not included in the LCA and is not declared

LCA INFORMATION

Type of EPD	The EPD in question is cradle-to-gate with modules C1-C4 and module D.
Geographical scope	Performance was calculated with reference to the Citterio S.p.A. plant in Sirone. The reference market is Global.
Temporal validity	The reference period is the calendar year 2021.
Database used	Ecoinvent 3.8
Software:	SimaPro 9.4.0.2
Declared Unit	1 office partition wall is analysed as declared unit.
Allocation rules	Mass-based allocation considering purchases of processed raw materials in 2021.
Cut-off rules	No cut-off considered.
Proxy data	No proxy data.

Production Process


The design and production processes take place at Citterio's Sirone plant.

The process begins with the receipt of raw materials and semi-finished products, which are stored in the warehouse. The materials are then recovered along the path of production and assembly of the wall components.

The production processes include, for:

- CHIPBOARD PANELS, an initial visual quality control is carried out, followed by a cutting process to obtain the desired dimensions. This is followed by the veneering process with melamine resin edging with oak veneer. The waste generated by the cutting process is partly destined to be burnt in a kiln with energy recovery and partly disposed of externally with EWC code 030105;
- SOLID WOOD: the wood profiles are cut to the desired dimensions and undergo drilling and milling;
- ALUMINIUM AND STEEL PROFILES: cut to the desired dimensions;
- WOODEN PANELS AND PROFILES: coating;
- Packaging of product components to be assembled on site.

The system diagram of the solid wall, which is the product with the most machining, is presented below. For the other walls analysed, there is no machining of chipboard and cutting of metal profiles.

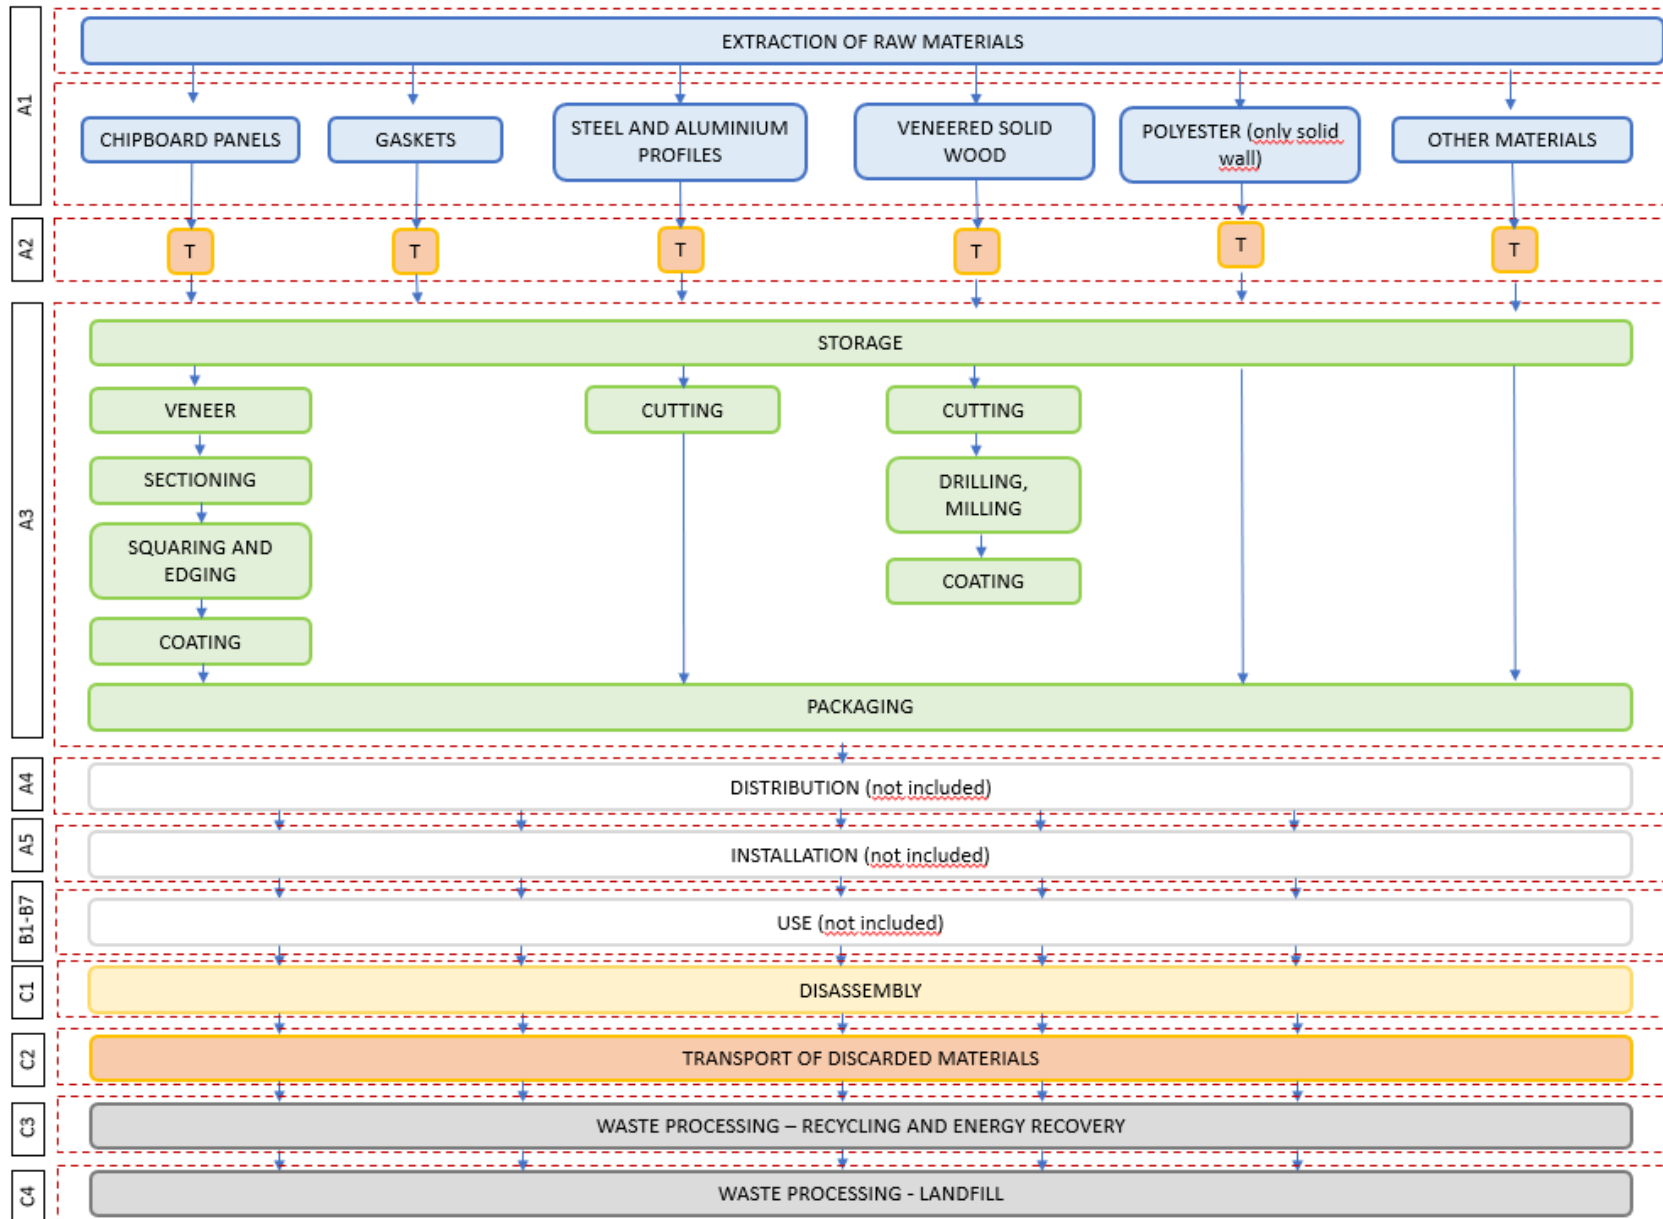

RESULTS

The following tables summarise the total impacts for each indicator of the 4 products under study.

Wood Wall / solid

Environmental impact indicators

Environmental impact parameters - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	8,74E+02	6,09E+00	6,45E+01	9,44E+02	1,50E+01	3,18E+01	5,25E+01	7,75E+00	-1,44E+02
GWP-biogenic	kg CO ₂ eq.	-3,27E+02	5,23E-03	1,01E+02	-2,26E+02	2,63E-03	1,71E-02	2,28E+02	6,88E+01	5,38E+00
GWP-luluc	kg CO ₂ eq.	1,89E+00	2,41E-03	1,99E-02	1,92E+00	4,90E-04	1,32E-02	5,51E-03	1,24E-03	-8,14E-02
GWP-total	kg CO ₂ eq.	5,50E+02	6,10E+00	1,65E+02	7,21E+02	1,50E+01	3,19E+01	2,81E+02	7,66E+01	-1,39E+02
ODP	kg CFC 11 eq.	3,38E-04	1,42E-06	7,59E-07	3,40E-04	1,72E-07	6,92E-06	3,61E-07	3,37E-07	-2,61E-05
AP	mol H ⁺ eq.	6,70E+00	3,08E-02	3,59E-01	7,09E+00	7,54E-03	1,62E-01	3,49E-02	9,94E-03	-9,31E-01
EP-freshwater	kg P eq.	2,97E-01	3,96E-04	7,00E-03	3,05E-01	1,28E-04	2,39E-03	1,24E-03	2,14E-04	-6,45E-02
EP-marine	kg N eq.	9,52E-01	1,06E-02	1,76E-01	1,14E+00	8,61E-03	5,47E-02	1,64E-02	1,47E-01	-1,22E-01
EP-terrestrial	mol N eq.	1,92E+01	1,16E-01	1,93E+00	2,12E+01	3,26E-02	5,98E-01	1,62E-01	3,60E-02	-1,41E+00
POCP	kg NMVOC eq.	3,51E+00	3,31E-02	4,62E-01	4,00E+00	8,65E-03	1,70E-01	4,04E-02	1,28E-02	-3,84E-01
ADP-minerals&metals*	kg Sb eq.	1,41E-02	2,14E-05	2,24E-05	1,42E-02	2,02E-06	1,09E-04	1,10E-05	3,81E-06	-1,21E-04
ADP-fossil*	MJ	1,86E+04	9,28E+01	9,04E+01	1,88E+04	1,33E+01	4,73E+02	3,68E+01	2,67E+01	-1,79E+03
WDP*	m ³	5,10E+02	2,78E-01	8,13E-01	5,11E+02	7,23E-01	1,63E+00	8,51E-01	1,13E+00	-6,26E+00
Acronyms	<p>GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption</p> <p>* The results of this indicator should be used with caution given their high uncertainty or limited experience with the indicator</p>									

Use of resources - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	MJ	8,97E+02	1,31E+00	2,90E+00	9,01E+02	3,87E-01	5,45E+00	1,40E+00	5,45E-01	-1,32E+02
PERM	MJ	3,24E+03	0,00E+00	1,70E+01	3,26E+03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	4,14E+03	1,31E+00	1,99E+01	4,16E+03	3,87E-01	5,45E+00	1,40E+00	5,45E-01	-1,32E+02
PENRE	MJ	1,41E+04	9,28E+01	7,67E+01	1,43E+04	1,33E+01	4,73E+02	3,68E+01	2,67E+01	-1,79E+03
PENRM	MJ	4,45E+03	0,00E+00	1,38E+01	4,46E+03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	1,86E+04	9,28E+01	9,05E+01	1,88E+04	1,33E+01	4,73E+02	3,68E+01	2,67E+01	-1,79E+03
SM	kg	1,55E+02	0,00E+00	0,00E+00	1,55E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	1,50E+01	1,04E-02	2,95E-02	1,50E+01	2,28E-02	5,41E-02	4,00E-02	2,77E-02	-2,32E-01
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water									

Waste production - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	kg	1,46E-01	2,42E-04	1,41E-04	1,47E-01	3,30E-05	1,25E-03	1,05E-04	4,05E-05	3,23E-02
NHWD	kg	1,03E+02	4,78E+00	5,31E+00	1,13E+02	2,76E+00	2,40E+01	3,26E+00	1,06E+02	-2,13E+01
RWD	kg	5,50E-02	6,28E-04	3,77E-04	5,60E-02	7,23E-05	3,09E-03	1,22E-04	1,57E-04	-3,49E-03
Acronyms	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed									

Output flows - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	0,00E+00	0,00E+00	3,57E+01	3,57E+01	0,00E+00	0,00E+00	5,54E+01	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	1,15E-01	1,15E-01	0,00E+00	0,00E+00	1,50E+02	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Acronyms	CRU = Components for re-use; MR = Material for recycling; MER = Materials for energy recovery; EEE = Exported energy, electricity; EET = Exported energy, thermal									

Additional indicators - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	Disease Inc.	7,03E-05	5,43E-07	3,12E-06	7,40E-05	8,29E-08	2,79E-06	3,56E-07	1,91E-07	-4,61E-06
IRP**	kBq U235 eq.	1,16E+02	4,77E-01	5,43E-01	1,17E+02	6,80E-02	2,17E+00	1,55E-01	1,29E-01	-1,11E+01
ETP-fw*	CTUe	1,85E+04	7,24E+01	6,72E+04	8,57E+04	3,79E+01	4,06E+02	1,31E+02	7,32E+02	-1,50E+03
HTP-nc*	CTUh	1,47E-05	7,59E-08	1,58E-05	3,05E-05	5,33E-08	3,94E-07	3,42E-07	2,50E-08	5,07E-07
HTP-c*	CTUh	2,16E-06	2,35E-09	2,06E-07	2,37E-06	2,00E-09	1,21E-08	7,54E-09	8,88E-10	3,34E-07
SQP*	Pt	8,56E+03	6,38E+01	7,86E+01	8,70E+03	3,68E+00	3,21E+02	1,77E+01	6,16E+01	-3,66E+02
Acronyms	<p>CRU = Components for re-use; MR = Material for recycling; MER = Materials for energy recovery; EEE = Exported energy, electricity; EET = Exported energy, thermal</p> <p>* The results of this indicator should be used with caution given their high uncertainty or limited experience with the indicator Disclaimer</p> <p>** This impact category deals primarily with the possible impact on human health of low-dose ionizing radiation from the nuclear fuel cycle. Do not consider effects due to possible nuclear accidents, occupational exposure or due to the disposal of radioactive waste in underground landfills. Potential ionizing radiation from the ground, radon and some building materials are also not evaluated from this indicator.</p>									

Wood Wall / double glass

Environmental impact indicators

Environmental impact parameters - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	8,09E+02	5,40E+00	8,33E+00	8,23E+02	1,50E+01	8,45E+01	1,35E+00	4,08E+00	- 2,14E+01
GWP-biogenic	kg CO ₂ eq.	- 3,00E+01	4,64E-03	4,41E-01	- 2,95E+01	2,63E-03	4,55E-02	2,62E+01	6,45E+00	3,69E+00
GWP-luluc	kg CO ₂ eq.	1,14E+00	2,14E-03	1,07E-02	1,16E+00	4,90E-04	3,51E-02	1,34E-03	3,69E-03	6,65E-03
GWP-total	kg CO ₂ eq.	7,81E+02	5,41E+00	8,78E+00	7,95E+02	1,50E+01	8,46E+01	2,76E+01	1,05E+01	- 1,77E+01
ODP	kg CFC 11 eq.	1,14E-04	1,26E-06	5,99E-07	1,16E-04	1,72E-07	1,84E-05	6,99E-08	1,34E-06	-9,12E-07
AP	mol H ⁺ eq.	6,90E+00	2,74E-02	4,33E-02	6,97E+00	7,54E-03	4,29E-01	5,06E-03	3,56E-02	-1,53E-01
EP-freshwater	kg P eq.	2,28E-01	3,51E-04	1,64E-03	2,30E-01	1,28E-04	6,36E-03	2,15E-04	4,09E-04	-9,98E-03
EP-marine	kg N eq.	1,17E+00	9,42E-03	1,69E-02	1,20E+00	8,61E-03	1,45E-01	2,14E-03	1,65E-02	-2,12E-02
EP-terrestrial	mol N eq.	1,39E+01	1,03E-01	1,81E-01	1,42E+01	3,26E-02	1,59E+00	2,12E-02	1,37E-01	-2,18E-01
POCP	kg NMVOC eq.	3,42E+00	2,94E-02	4,77E-02	3,50E+00	8,65E-03	4,52E-01	5,48E-03	3,96E-02	-6,29E-02
ADP-minerals&metals*	kg Sb eq.	8,59E-03	1,89E-05	2,21E-05	8,63E-03	2,02E-06	2,91E-04	2,01E-06	1,29E-05	9,46E-05
ADP-fossil*	MJ	1,09E+04	8,23E+01	7,01E+01	1,10E+04	1,33E+01	1,26E+03	7,80E+00	9,84E+01	- 2,48E+02
WDP*	m ³	2,85E+02	2,47E-01	9,55E-01	2,87E+02	7,23E-01	4,34E+00	-4,65E-02	4,47E+00	- 1,81E+00
Acronyms	<p>GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption</p> <p>* The results of this indicator should be used with caution given their high uncertainty or limited experience with the indicator</p>									

Use of resources - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	MJ	1,24E+03	1,16E+00	3,96E+00	1,25E+03	3,87E-01	1,45E+01	3,77E-01	1,15E+00	-2,48E+01
PERM	MJ	3,69E+02	0,00E+00	0,00E+00	3,69E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	1,61E+03	1,16E+00	3,96E+00	1,62E+03	3,87E-01	1,45E+01	3,77E-01	1,15E+00	-2,48E+01
PENRE	MJ	1,07E+04	8,23E+01	6,56E+01	1,09E+04	1,33E+01	1,26E+03	7,80E+00	9,84E+01	-2,48E+02
PENRM	MJ	1,42E+02	0,00E+00	4,60E+00	1,47E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	1,09E+04	8,23E+01	7,02E+01	1,10E+04	1,33E+01	1,26E+03	7,80E+00	9,84E+01	-2,48E+02
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	8,22E+00	9,18E-03	3,18E-02	8,26E+00	2,28E-02	1,44E-01	6,42E-04	1,07E-01	-5,68E-02
Acronyms	<p>PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources</p>									

used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

Waste production - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	kg	2,07E-02	2,15E-04	1,35E-04	2,11E-02	3,30E-05	3,32E-03	1,39E-05	1,58E-04	6,21E-03
NHWD	kg	1,23E+02	4,24E+00	5,65E+00	1,33E+02	2,76E+00	6,38E+01	6,23E+00	4,25E+02	-2,35E+00
RWD	kg	4,03E-02	5,57E-04	2,84E-04	4,11E-02	7,23E-05	8,21E-03	3,15E-05	6,07E-04	-4,86E-04
Acronyms	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed									

Output flows - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	0,00E+00	0,00E+00	3,40E+00	3,40E+00	0,00E+00	0,00E+00	5,03E+01	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	1,64E-02	1,64E-02	0,00E+00	0,00E+00	1,62E+01	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Acronyms	CRU = Components for re-use; MR = Material for recycling; MER = Materials for energy recovery; EEE = Exported energy, electricity; EET = Exported energy, thermal									

Additional indicators - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	Disease Inc.	7,46E-05	4,81E-07	1,91E-06	7,70E-05	8,29E-08	7,42E-06	6,42E-08	7,46E-07	-8,95E-07
IRP**	kBq U235 eq.	8,95E+01	4,23E-01	5,26E-01	9,04E+01	6,80E-02	5,76E+00	4,07E-02	4,27E-01	-1,54E+00
ETP-fw*	CTUe	5,15E+04	6,43E+01	4,61E+03	5,62E+04	3,79E+01	1,08E+03	1,16E+01	2,03E+02	-2,81E+02
HTP-nc*	CTUh	1,19E-05	6,74E-08	1,14E-06	1,32E-05	5,33E-08	1,05E-06	3,99E-08	4,01E-08	-2,11E-07
HTP-c*	CTUh	6,84E-07	2,08E-09	1,87E-08	7,05E-07	2,00E-09	3,20E-08	9,65E-10	2,87E-09	-3,97E-09
SQP*	Pt	7,60E+03	5,66E+01	3,05E+01	7,69E+03	3,68E+00	8,51E+02	6,99E+00	2,50E+02	-6,70E+01
Acronyms	<p>CRU = Components for re-use; MR = Material for recycling; MER = Materials for energy recovery; EEE = Exported energy, electricity; EET = Exported energy, thermal</p> <p>* The results of this indicator should be used with caution given their high uncertainty or limited experience with the indicator Disclaimer</p> <p>** This impact category deals primarily with the possible impact on human health of low-dose ionizing radiation from the nuclear fuel cycle. Do not consider effects due to possible nuclear accidents, occupational exposure or due to the disposal of radioactive waste in underground landfills. Potential ionizing radiation from the ground, radon and some building materials are also not evaluated from this indicator.</p>									

Wood Wall / single glass

Environmental impact indicators

Environmental impact parameters - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	4,20E+02	2,74E+00	6,07E+00	4,28E+02	1,50E+01	4,49E+01	8,31E-01	2,06E+00	-1,52E+01
GWP-biogenic	kg CO ₂ eq.	-3,83E+01	2,35E-03	3,83E-01	-3,79E+01	2,63E-03	2,42E-02	3,01E+01	8,15E+00	4,24E+00
GWP-luluc	kg CO ₂ eq.	6,13E-01	1,08E-03	1,15E-03	6,15E-01	4,90E-04	1,87E-02	1,05E-03	1,88E-03	-2,90E-03
GWP-total	kg CO ₂ eq.	3,82E+02	2,74E+00	6,45E+00	3,91E+02	1,50E+01	4,50E+01	3,09E+01	1,02E+01	-1,09E+01
ODP	kg CFC 11 eq.	5,95E-05	6,39E-07	1,78E-07	6,03E-05	1,72E-07	9,76E-06	5,48E-08	6,78E-07	-8,26E-07
AP	mol H ⁺ eq.	3,49E+00	1,39E-02	3,17E-02	3,54E+00	7,54E-03	2,28E-01	4,53E-03	1,80E-02	-9,20E-02
EP-freshwater	kg P eq.	1,19E-01	1,78E-04	9,18E-04	1,20E-01	1,28E-04	3,38E-03	1,90E-04	2,11E-04	-6,44E-03
EP-marine	kg N eq.	6,06E-01	4,78E-03	1,44E-02	6,25E-01	8,61E-03	7,72E-02	2,04E-03	9,09E-03	-1,37E-02
EP-terrestrial	mol N eq.	7,03E+00	5,22E-02	1,56E-01	7,24E+00	3,26E-02	8,44E-01	2,01E-02	6,95E-02	-1,44E-01
POCP	kg NMVOC eq.	1,79E+00	1,49E-02	3,88E-02	1,84E+00	8,65E-03	2,40E-01	5,12E-03	2,01E-02	-4,07E-02
ADP-minerals&metals*	kg Sb eq.	4,26E-03	9,61E-06	9,20E-06	4,28E-03	2,02E-06	1,54E-04	1,58E-06	6,54E-06	2,66E-05
ADP-fossil*	MJ	5,77E+03	4,18E+01	2,69E+01	5,83E+03	1,33E+01	6,67E+02	6,12E+00	4,98E+01	-1,90E+02
WDP*	m ³	1,54E+02	1,25E-01	5,20E-01	1,55E+02	7,23E-01	2,30E+00	-1,33E-01	2,26E+00	-1,49E+00
Acronyms	<p>GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption</p> <p>* The results of this indicator should be used with caution given their high uncertainty or limited experience with the indicator</p>									

Use of resources - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	MJ	8,86E+02	5,89E-01	1,52E+00	8,88E+02	3,87E-01	7,69E+00	2,68E-01	5,87E-01	-2,82E+01
PERM	MJ	4,28E+02	0,00E+00	0,00E+00	4,28E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	1,31E+03	5,89E-01	1,52E+00	1,32E+03	3,87E-01	7,69E+00	2,68E-01	5,87E-01	-2,82E+01
PENRE	MJ	5,66E+03	4,18E+01	2,23E+01	5,72E+03	1,33E+01	6,67E+02	6,13E+00	4,99E+01	-1,90E+02
PENRM	MJ	1,09E+02	0,00E+00	4,60E+00	1,13E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	5,77E+03	4,18E+01	2,69E+01	5,84E+03	1,33E+01	6,67E+02	6,13E+00	4,99E+01	-1,90E+02
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	4,41E+00	4,66E-03	1,54E-02	4,43E+00	2,28E-02	7,64E-02	-1,65E-03	5,42E-02	-5,10E-02
Acronyms	<p>PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw</p>									

materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

Waste production - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	kg	1,01E-02	1,09E-04	4,33E-05	1,02E-02	3,30E-05	1,76E-03	1,18E-05	8,01E-05	2,96E-03
NHWD	kg	6,33E+01	2,15E+00	2,38E+00	6,78E+01	2,76E+00	3,39E+01	3,27E+00	2,15E+02	-1,53E+00
RWD	kg	2,09E-02	2,82E-04	7,60E-05	2,13E-02	7,23E-05	4,36E-03	2,33E-05	3,07E-04	-3,83E-04
Acronyms	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed									

Output flows - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	0,00E+00	0,00E+00	3,88E+00	3,88E+00	0,00E+00	0,00E+00	2,70E+01	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	1,87E-02	1,87E-02	0,00E+00	0,00E+00	1,81E+01	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Acronyms	CRU = Components for re-use; MR = Material for recycling; MER = Materials for energy recovery; EEE = Exported energy, electricity; EET = Exported energy, thermal									

Additional indicators - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	Disease Inc.	3,81E-05	2,44E-07	1,96E-06	4,03E-05	8,29E-08	3,94E-06	5,55E-08	3,78E-07	-5,47E-07
IRP**	kBq U235 eq.	4,69E+01	2,15E-01	1,86E-01	4,73E+01	6,80E-02	3,06E+00	3,00E-02	2,17E-01	-1,24E+00
ETP-fw*	CTUe	2,60E+04	3,26E+01	5,29E+03	3,13E+04	3,79E+01	5,73E+02	9,00E+00	1,00E+02	-1,90E+02
HTP-nc*	CTUh	6,11E-06	3,42E-08	1,26E-06	7,41E-06	5,33E-08	5,56E-07	4,14E-08	2,07E-08	-8,90E-08
HTP-c*	CTUh	3,84E-07	1,06E-09	1,77E-08	4,02E-07	2,00E-09	1,70E-08	9,55E-10	1,46E-09	4,28E-09
SQP*	Pt	6,27E+03	2,87E+01	6,78E+00	6,31E+03	3,68E+00	4,52E+02	4,58E+00	1,26E+02	-1,06E+02
Acronyms	<p>CRU = Components for re-use; MR = Material for recycling; MER = Materials for energy recovery; EEE = Exported energy, electricity; EET = Exported energy, thermal</p> <p>* The results of this indicator should be used with caution given their high uncertainty or limited experience with the indicator Disclaimer</p> <p>** This impact category deals primarily with the possible impact on human health of low-dose ionizing radiation from the nuclear fuel cycle. Do not consider effects due to possible nuclear accidents, occupational exposure or due to the disposal of radioactive waste in underground landfills. Potential ionizing radiation from the ground, radon and some building materials are also not evaluated from this indicator.</p>									

Wood Wall / lateral single glass

Environmental impact indicators

Environmental impact parameters - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	4,26E+02	2,74E+00	6,08E+00	4,35E+02	1,50E+01	4,50E+01	8,07E-01	2,05E+00	- 2,04E+01
GWP-biogenic	kg CO ₂ eq.	- 3,83E+01	2,36E-03	3,84E-01	- 3,79E+01	2,63E-03	2,42E-02	3,06E+01	8,16E+00	4,27E+00
GWP-luluc	kg CO ₂ eq.	6,78E-01	1,09E-03	1,15E-03	6,80E-01	4,90E-04	1,87E-02	1,06E-03	1,88E-03	-3,56E-03
GWP-total	kg CO ₂ eq.	3,89E+02	2,75E+00	6,46E+00	3,98E+02	1,50E+01	4,50E+01	3,14E+01	1,02E+01	- 1,62E+01
ODP	kg CFC 11 eq.	6,01E-05	6,40E-07	1,78E-07	6,09E-05	1,72E-07	9,77E-06	5,55E-08	6,78E-07	-9,72E-07
AP	mol H ⁺ eq.	3,74E+00	1,39E-02	3,17E-02	3,79E+00	7,54E-03	2,28E-01	4,60E-03	1,81E-02	-1,41E-01
EP-freshwater	kg P eq.	1,22E-01	1,78E-04	9,18E-04	1,24E-01	1,28E-04	3,38E-03	1,93E-04	2,12E-04	-9,38E-03
EP-marine	kg N eq.	6,20E-01	4,78E-03	1,44E-02	6,39E-01	8,61E-03	7,73E-02	2,07E-03	9,03E-03	-2,02E-02
EP-terrestrial	mol N eq.	8,03E+00	5,23E-02	1,56E-01	8,24E+00	3,26E-02	8,45E-01	2,04E-02	6,96E-02	-2,09E-01
POCP	kg NMVOC eq.	1,81E+00	1,49E-02	3,89E-02	1,87E+00	8,65E-03	2,40E-01	5,20E-03	2,01E-02	-5,99E-02
ADP-minerals&metals*	kg Sb eq.	4,95E-03	9,62E-06	9,20E-06	4,97E-03	2,02E-06	1,55E-04	1,60E-06	6,55E-06	7,38E-05
ADP-fossil*	MJ	5,87E+03	4,18E+01	2,69E+01	5,94E+03	1,33E+01	6,68E+02	6,20E+00	4,99E+01	- 2,42E+02
WDP*	m ³	1,57E+02	1,25E-01	5,20E-01	1,58E+02	7,23E-01	2,31E+00	-1,39E-01	2,27E+00	- 1,73E+00
Acronyms	<p>GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption</p> <p>* The results of this indicator should be used with caution given their high uncertainty or limited experience with the indicator</p>									

Use of resources - Results per declared unit										
Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	MJ	9,05E+02	5,90E-01	1,52E+00	9,07E+02	3,87E-01	7,69E+00	2,71E-01	5,91E-01	-2,88E+01
PERM	MJ	4,29E+02	0,00E+00	0,00E+00	4,29E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	1,33E+03	5,90E-01	1,52E+00	1,34E+03	3,87E-01	7,69E+00	2,71E-01	5,91E-01	-2,88E+01
PENRE	MJ	5,76E+03	4,18E+01	2,23E+01	5,83E+03	1,33E+01	6,68E+02	6,21E+00	4,99E+01	-2,42E+02
PENRM	MJ	1,06E+02	0,00E+00	4,60E+00	1,10E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	5,87E+03	4,18E+01	2,69E+01	5,94E+03	1,33E+01	6,68E+02	6,21E+00	4,99E+01	-2,42E+02
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	4,56E+00	4,66E-03	1,54E-02	4,58E+00	2,28E-02	7,65E-02	-1,76E-03	5,43E-02	-5,94E-02
Acronyms	<p>PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of</p>									

secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels;
FW = Use of net fresh water

Waste production - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	kg	1,56E-02	1,09E-04	4,33E-05	1,58E-02	3,30E-05	1,77E-03	1,20E-05	8,02E-05	5,35E-03
NHWD	kg	6,46E+01	2,15E+00	2,39E+00	6,91E+01	2,76E+00	3,40E+01	3,28E+00	2,15E+02	-2,29E+00
RWD	kg	2,13E-02	2,83E-04	7,61E-05	2,17E-02	7,23E-05	4,37E-03	2,36E-05	3,08E-04	-4,99E-04
Acronyms	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed									

Output flows - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	0,00E+00	0,00E+00	3,89E+00	3,89E+00	0,00E+00	0,00E+00	2,73E+01	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	1,88E-02	1,88E-02	0,00E+00	0,00E+00	1,84E+01	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Acronyms	CRU = Components for re-use; MR = Material for recycling; MER = Materials for energy recovery; EEE = Exported energy, electricity; EET = Exported energy, thermal									

Additional indicators - Results per declared unit

Indicator	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	Disease Inc.	4,05E-05	2,44E-07	1,97E-06	4,27E-05	8,29E-08	3,95E-06	5,63E-08	3,78E-07	-8,40E-07
IRP**	kBq U235 eq.	4,78E+01	2,15E-01	1,86E-01	4,82E+01	6,80E-02	3,07E+00	3,03E-02	2,17E-01	-1,55E+00
ETP-fw*	CTUe	2,64E+04	3,26E+01	5,31E+03	3,17E+04	3,79E+01	5,74E+02	9,06E+00	1,51E+02	-2,67E+02
HTP-nc*	CTUh	6,49E-06	3,42E-08	1,26E-06	7,79E-06	5,33E-08	5,57E-07	4,21E-08	2,08E-08	-1,74E-07
HTP-c*	CTUh	4,00E-07	1,06E-09	1,77E-08	4,19E-07	2,00E-09	1,70E-08	9,70E-10	1,46E-09	-1,19E-09
SQP*	Pt	6,30E+03	2,87E+01	6,78E+00	6,34E+03	3,68E+00	4,53E+02	4,62E+00	1,27E+02	-1,14E+02
Acronyms	<p>CRU = Components for re-use; MR = Material for recycling; MER = Materials for energy recovery; EEE = Exported energy, electricity; EET = Exported energy, thermal</p> <p>* The results of this indicator should be used with caution given their high uncertainty or limited experience with the indicator Disclaimer</p> <p>** This impact category deals primarily with the possible impact on human health of low-dose ionizing radiation from the nuclear fuel cycle. Do not consider effects due to possible nuclear accidents, occupational exposure or due to the disposal of radioactive waste in underground landfills. Potential ionizing radiation from the ground, radon and some building materials are also not evaluated from this indicator.</p>									

Biogenic carbon

The content of biogenic carbon in the product and packaging of the finished product was quantified according to EN 16449:2014.

Biogenic carbon content	Biogenic carbon content in product [kg C]	Biogenic carbon content in accompanying packaging [kg C]
Wood Wall / solid	92,45	0,44
Wood Wall / double glass	10,45	-
Wood Wall / single glass	12,13	-
Wood Wall / lateral single glass	12,15	-

CALCULATION METHODOLOGY

The methodology followed as a reference standard is that of the Life Cycle Assessment (LCA); «LCA addresses environmental aspects and potential environmental impacts (e.g. resource use and environmental consequences of releases) throughout the product life cycle, from raw material acquisition through manufacturing and use, right through to end-of-life treatment, recycling and final disposal (i.e. from cradle to grave).» [ISO 14040:2021].

Declared Unit/ Functional Unit

The study was carried out using 1 product as a reference unit. The allocation was made on a mass basis.

Rules of Exclusion and Cut off

No cut-off considered.

Inputs excluded:

- employee travel;
- packaging of the auxiliary material;
- the natural gas used for heating offices and the company canteen.

Data quality

With reference to the EN 15804:2012+A2:2019 standard, the analysis describes specific products using specific data for the processes on which the manufacturer has an influence:

- all data related to the CORE phases are site specific;
- for UPSTREAM data, the data regarding BOM components (material, weight, quantity), raw materials, energy use, emissions and waste are derived from company databases and they are site-specific. The type of material and processes were taken from the Ecoinvent 3.8 database.

The company procures itself through the national energy system, and therefore the Italian residual mix is adopted, using as a source of data the latest AIB report (AIB, 2021).

With regards to the modelling of the particleboard and glass double glazing, the relative Ecoinvent datasets have been adapted to better suit their material composition.

The particleboard used for the solid wall is made of 93,6% recycled content, therefore the dataset *Particleboard, uncoated {RER}| market for particleboard, uncoated | Cut-off, U* was adjusted to that content by reportioning the internal inputs of *Particleboard, uncoated {RER}| particleboard production, uncoated, average glue mix | Cut-off, U*, namely those referring to Pulpwood and Wood chips.

Adjustments were made also to the dataset used for the specific laminated glass used which does not contain any gas (argon) and aluminium finishes. For this reason, the latter inputs contained within the dataset *Glazing, double, U<1.1 W/m2K, laminated safety glass {RER}| production | Cut-off, U* have been zeroed out.

Generic data

In the use of generic data, the following criteria were applied:

- geographic equivalence;
- technological equivalence;
- equivalence with respect to system boundaries.

For generic data, information between 2019 and 2022 was considered.

For the disposal scenarios, see the table below.

Assumptions / Scenarios

As for the steel trestles for transporting the glass, it was considered that the trestle is used at least twice a week for 2-3 years, so that the total weight (74 kg) is divided by the frequency of use multiplied by the kg transported (a transport of 3 m³ of glass of 27 kg/m³).

Modules	Scenarios
C1 Disassembling	The partition walls are completely disassemblable. Therefore, its dismantling was modelled through the use of an 1100W hammer drill, while the use of a 16 kW mini electric crane with a maximum working height of 23.5m, suitable for glass installation and the installation of façades and steel structures, was considered for handling the glass. The installation and assembly time was estimated at 10 minutes. The respective Ecoinvent modules used are <i>Electricity, low voltage {GLO} market group for Cut-off, U</i> and <i>Machine operation, diesel, < 18.64 kW, low load factor {GLO} market for Cut-off, U</i> .
C2 Transport of the disassembled materials	A distance of 1000 km was considered for the transport of waste modelled with <i>Transport, freight, lorry 16-32 metric ton, EURO4 {RoW} transport, freight, lorry 16-32 metric ton, EURO4 Cut-off, U</i> .
C3 Waste management, recycling and energy recovery	The recycling and incineration with energy recovery refer to a global context. Different literature and Organisation reports sources were consulted for obtaining the percentage rates of waste processing at the end of life. The % rates and sources of the materials are: <ul style="list-style-type: none"> - Wood: 10% recycling; 70% incineration with energy recovery (Reindahl Andersen, M. et al., 2018); - Glass: 10% recycling (Reindahl Andersen, M. et al., 2018; Glass for Europe 2013) - Aluminium: 76% recycling (International Aluminium Institute, 2020). - Steel: 85% recycling (Arcelor Mittal, 2023). - ABS, PC, EPDM: 9% recycling; 19% incineration with energy recovery (OECD, 2023).
C4 Waste management, landfill disposal	The disposal scenarios refer to a global context. The % rates for the materials are: <ul style="list-style-type: none"> - Wood: 20% - Glass: 90% - Aluminium: 24% - Steel: 15% - ABS, PC, EPDM: 72%
D Benefits beyond the system boundaries	This module includes benefits related to material recycling and electrical energy production from material incineration. For wood, aluminium, steel, plastics and rubber, substitution of virgin material has been considered according to the respective % rates. For materials undergoing incineration, namely wood, plastics and rubber, the relative heating value was used to calculate the electricity production. The latter was then modelled with <i>Electricity, medium voltage {GLO} market group for Cut-off, U</i> .

References

- [1] ISO 14040: 2006, Environmental Management - Life Cycle Assessment - Principles and Framework.
- [2] ISO 14044: 2006, Environmental Management - Life Cycle Assessment - Requirements and Guidelines.
- [3] UNI EN ISO 14025:2010, Environmental Labels and Declarations - Type III Environmental Declarations - Principles and Procedures.
- [4] EN15804:2012+A2:2019/AC:2021. Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products.
- [5] PCR ICMQ-001-15_Rev 3. Construction Products and Services. Data di emissione: 02/12/2019.
- [6] EPDI Italy Regulation rev. 5.2 published on 16/02/2022.
- [7] Background report. F. Gilardelli, C. Albin, Citterio S.p.A. Life cycle analysis of 3X3 Wood Wall Partitions. May 2023.
- [8] Reindahl Andersen, M. et al (2018). Screening of EU and national policies, legislation and trends for EoL wooden doors and windows. Disponibile al sito web https://www.eurowindow.eu/fileadmin/redaktion_eurowindow/miscellaneous/EuroWindow_Screening_study_on_wooden_doors_and_windows_EoL_treatment_Final_report_1810.pdf.
- [9] NPCR 014 2021 Part B for Windows and Doors ver4, pubblicata in data 10/04/2023.
- [10] Glass for Europe (2013). Recycling of end-of-life building glass. Glass for Europe's contribution. Disponibile al sito web https://glassforeurope.com/wp-content/uploads/2018/04/GfE-Position-Paper-on-recycling-of-building-glass_June2013.pdf.
- [11] Arcelor Mittal (2023). By-products, scrap and the circular economy: SD outcome 4. Efficient use of resources and high recycling rates. Disponibile al sito web <https://corporate.arcelormittal.com/sustainability/by-products-scrap-and-the-circular-economy#:~:text=Steel%20is%20the%20only%20major,recycled%20to%20produce%20new%20steel>.
- [12] International Aluminium Institute (2020). International Aluminium Institute publishes global recycling data. Disponibile al sito web <https://international-aluminium.org/international-aluminium-institute-publishes-global-recycling-data/>.
- [13] OECD (2023). Global Plastics Outlook: Economic Drivers, Environmental Impacts and Policy Options. Disponibile al sito web <https://www.oecd-ilibrary.org/sites/de747aef-en/index.html?itemId=/content/publication/de747aef-en>.