

Environmental Product Declaration

In accordance with ISO 14025 and EN 50693:2019 for:


Three-phase Industrial Transformer 630 kVA (305.247*)

from

Indústria de Transformadores Itaipu Ltda.



Declaration number	<u>EPDItaipu03</u>
Production site:	Avenida Sergio Abdul Nour, 2106, Distrito Industrial II – CEP 14900-000 – Itápolis, State of São Paulo, Brazil
Programme:	EPDItaly®, www.epditaly.it
Programme operator:	EPDItaly
EPD registration number:	EPDITALY0659
Issue date:	2025-06-18
Valid until:	2026-12-18

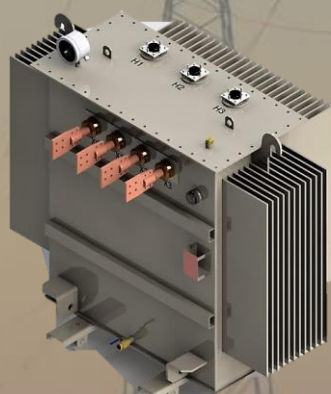

Registered under the mutual recognition between EPDItaly and other programme operators (in the case of mutual recognition). www.epditaly.it

**this EPD refers to a product that is in the design phase and not yet manufactured.*

General information

<u>EPD OWNER</u>	
Company name:	Indústria de Transformadores Itaipu Ltda.
Registered office:	Avenida Sergio Abdul Nour, 2106, Distrito Industrial II – CEP 14900-000 – Itápolis, State of São Paulo, Brazil
Contacts for information on the EPD:	Malberto Bertini Franco Phone: +55 (16) 3263 9400 e-mail: qualidade@itaiputransformadores.com.br
<u>PROGRAMME OPERATOR</u>	
EPDIItaly	Via Gaetano De Castillia no. 10 - 20124 Milan, Italy
<u>EPD INFORMATION</u>	
Product name:	Three-phase industrial transformer – 630 kVA (305.247).
Product type:	The product covered by the EPD is at the design stage; the future execution of the product in accordance with the design data is the sole responsibility of the EPD Owner.
Site:	Avenida Sergio Abdul Nour, 2106, Distrito Industrial II – CEP 14900-000 – Itápolis, State of São Paulo, Brazil.
Summary description and technical information of product:	The 305.247 Three-phase industrial transformer is an electrical device that transfer energy from one circuit to another by magnetic coupling without requiring relative motion between its parts and comprises two coupled windings and a magnetic core to concentrate magnetic flux made of silicon-steel. It is a three-phase transformer in mineral cooled oil, with nominal power of 630 kVA and final project mass (without packaging) of 2,525 kg.
Scope of product:	A single piece of transformer operating for 35 years. Specific product EPD – concerning a specific product by a specific manufacturer, EPD is cradle-to-grave.
Geography:	World (raw materials), Brazil (production, use and end-of-life).
CPC Code:	46121 - Electrical transformers.
<u>VERIFICATION INFORMATION</u>	
PCR:	Core PCR EPDIItaly007: Electronic and Electrical Products and Systems, revision 3.1 (2024-11-12) Sub PCR EPDIItaly018: Electronic and Electrical Products and Systems – Power Transformers, version 3.6 (2024-07-01)
EPDIItaly Regulations:	Regulations of the EPDIItaly Programme rev 6.0, 2023-10-30 EN 50693 is the framework reference for the Product Category Rules (PCR)
LCA Project Report:	[Itaipu-LCA] 500-630-2000 kVA transformer_final_report_v2.1 (April 2025)
Independent Statement Verification/Validation:	
The PCR review was performed by EPDIItaly - info@epditaly.it.	
Independent verification of the declaration and of data performed according to ISO 14025:2010.	
<input type="checkbox"/> Internal <input checked="" type="checkbox"/> External	
Third-party verification/validation performed by:	
ICMQ S.p.A., Via Gaetano De Castillia no. 10 - 20124 Milan, Italy. Accredited by Accredia	

Statement Comparability: Environmental statements published within the same product category, but from different programmes, may not be comparable. EPDs of electronic and electrical products may not be comparable if they do not comply with EN 50693. For further information about comparability, see EN 50693 and ISO 14025.

Statement Responsibility: The EPD Owner releases EPDIItaly from any noncompliance with environmental legislation. The holder of the declaration will be responsible for the information and supporting evidence. EPDIItaly accepts no responsibility for the information, data and results provided by the EPD Owner for the life cycle assessment.

Company information

Owner of the EPD: Indústria de Transformadores Itaipu Ltda.

Address: Avenida Sergio Abdul Nour, 2106, Distrito Industrial II – CEP 14900-271 – Itápolis, State of São Paulo, Brazil

Location of production site(s): Avenida Sergio Abdul Nour, 2106, Distrito Industrial II – CEP 14900-271 – Itápolis, State of São Paulo, Brazil

Website: www.itaiputransformadores.com.br/

Tel: +55 (16) 3263 9400

Contact: Malberto Bertini Franco

Email: qualidade@itaiputransformadores.com.br

About the organization

Founded in 1975, Industria de Transformadores Itaipu Ltda is a national reference company in the manufacture of distribution and power transformers, serving with excellence the private markets and electricity concessionaires in Brazil and Latin America. Itaipu portfolio includes single-phase, three-phase, ecological, power and special transformers, designed to meet the specifications of each customer, including commerce, industries, electricity concessionaires, cooperatives, installers and contractors.



TECHNOLOGY THAT TRANSFORMS

Itaipu mission is to offer solutions in generation, transmission and distribution of electric energy guaranteeing the satisfaction of its customers, employees, partners and shareholders.

Sustainability

Itaipu has the sustainability as one of the core values and includes continuous improvement, compliance with national laws, employee consciousness about company environmental policy, health and insurance working environment passing through lean manufacturing principles with waste generation reduction and controlled raw material consumption. Itaipu Transformers Industry and all its actions are obligatory to respect human rights, combating discrimination in all its forms. The company holds ISO 9001, ISO 14001 and ISO 45001 certifications.

Owned certifications



Product information

Product name:	Three-phase industrial transformer – 630 kVA	
Product description:	The 305.247 Three-phase industrial transformer is an electrical device that transfer energy from one circuit to another by magnetic coupling without requiring relative motion between its parts and comprises two coupled windings and a magnetic core to concentrate magnetic flux made of silicon-steel. It is a three-phase transformer in vegetal cooled oil, with nominal power of 630 kVA and final project mass (without packaging) of 2,525 kg. The packaging consist of wooden bars.	
Average dimensions:	1,850 mm height x 1,800 mm length x 1,030 mm width	Three-phase industrial transformer 
Expedition weight:	2,615 kg	
Product weight:	2,525 kg	
Packaging weight:	90 kg	
Type:	Three-phase industrial, oil-immersed	
Number of phases:	3P	
Voltage class:	Medium	
Nominal primary voltage	15 kV	
Nominal power:	630 kVA	
Colled-oil type:	Mineral (naphthenic)	
Products covered:	630 kVA three-phase industrial oil immersed transformer	
Geographical scope:	Brazil	

LCA information

Functional unit / declared unit:

A single piece of transformer operating for 35 years

Time representativeness:

January 2022 to December 2022.

Data representativeness:

Raw materials and end-of-life characterization are representative of the products. This also applies to the transformers' use phase since the losses are based on the product operational parameters. Inbound logistics and manufacturing phases data are based on similar products from which most of the bill-of-materials are equal with minor differences on some components, and that went through the same production processes at the same Production Unit with identical energy carriers. Therefore *"the database used is considered representative on the basis of the representativeness analysis carried out with respect to the data of a reference product of the EPD Owner"*.

Database(s) and LCA software used:

SimaPro® software v.9.5.0.2 developed by PRé Consultants was used to create the product system model. The ecoinvent® database version 3.9.1 provided the life cycle background data for product system modelling.

The database used is regarded as representative on the basis of a comparative study, which examined the data for a reference product of the EPD Owner

System boundaries:

Cradle-to-grave with upstream, core and downstream modules.

Modules declared, geographical scope, share of specific data and data variation:

Module	Raw material supply	Transport	Manufacturing	Distribution	Installation	Use and Maintenance	Deinstallation and End-of-Life
	Upstream		Core	Downstream			
Supply chain processes	extraction of raw materials and the production of semi-finished products and auxiliary items; electricity; production; transport of raw materials to Itaipu plant		transformer assembling, waste and effluent management at plant; air emissions from paint solvents	transformer transport into the operation site, installation and packaging waste management, operating for 35 years (RSL) in Brazil, deinstallation and transformer EoL, including metal recycling, insulating oil treatment and final disposal of non-recyclable fractions at sanitary landfill. Transport of waste flows			
Modules declared	X	X	X	X	X	X	X
Geography	GLO	BR	BR	BR	BR	BR	BR
Variation – sites	Not relevant						

Manufacturing:

Manufacturing data is aggregated for all the factory, and therefore, it is not possible to estimate inputs and outputs directly for a specific transformer since Itaipu produces other equipment at the same plant. Thus, to relate utility consumptions and waste generation per transformer, it was necessary to apportion aggregated data. The rationale was based on disaggregates electricity and LPG consumption based on the power produced and adjusts for product size. It incorporates a size/mass relationship, suggesting that larger products will likely consume more energy and ancillary materials, leading to increased waste production. Minor consumptions, such as glue, steel shots, welding wire and welding gases, among others, and waste generations were directly quantified throughout the production process. This quantification relied on a mass balance conducted before and after the production process. All waste flows were proportioned by the total mass of products manufactured. Solvent emissions during the painting and paint drying processes were quantified based on supplier estimations according to technical parameters.

The electricity consumed during the manufacturing stage is certified as being 100% hydro. To represent this in the LCA model, the dataset "*Electricity, high voltage {BR-South-eastern/Mid-western grid} | electricity production, hydro, reservoir, tropical region | Cut-off, U*" was used, which has the following **GWP emission factors: 0.066 kg CO₂eq./kWh (for GWP-total), 2.59E-05 kg CO₂eq./kWh (for GWP-fossil), 0.037 kg CO₂eq./kWh (for GWP-biogenic), and 0.029 kg CO₂eq./kWh (for GWP-LULUC).**

Distribution:

The transformer is transported to São Paulo (south-eastern Brazil) by road transportation in diesel-powered lorries. The distance was estimated according to the most probable road from Itapolis plant until São Paulo Municipality, 400 km.

Installation:

The installation phase implies in the transportation of 100 km of the transformer and its packaging from energy company storage until the operation site. Then, the transformer is lifted and (generally) installed through manual/pneumatic tools. This phase also includes the disposal of the packaging of the Transformer, first returning until the energy company waste management central (100 km) and then transported until the waste management company (200 km). Although the wood from the pallet can be

recovered/reused in various ways, since there is no guarantee of its end-of-life, it has been assumed that it is destined for sanitary landfill (conservative approach).

Use stage:

The total energy consumed during 35 RSL by the transformer is **1,344,441 kWh** (losses and operational consumptions). This value was calculated according to IEC 60076-1 technical standard, expressed in kWh via the following equation (PCR0018 v.3.5).

$$E_d[kWh] = [P_{load} \times K^2_{load} + P_{noload}] \times t_{years} \times RSL + P_{aux} \times f_{aux} \times t_{years} \times RSL$$

Table 1. Values applied to estimate the energy dissipated during transformer RSL.

Variable	305.247 – 630 kVA
P _{load} (kW)	6.50
k _{load}	0.70
P _{noload} (kW)	1.20
t _{years} (hours)	8,760
RSL (years)	35
Electricity (kWh)	1,344,441

*P_{load} and P_{noload} factors were estimated conservatively to meet design requirements, but they are unlikely to be achieved throughout the transformers' lifecycle.

End-of-Life:

End-of-Life (EoL) stage assumes that the discontinued equipment is sent for material recovering. The disassembling process is manual or done with the aid of pneumatic tools at the secondary metal recovering market. Most valuable fractions (steel, aluminium and copper) are recycled within the default recycling recovering rate established in BSI EN 50693:2019. Insulating oil is incinerated (without energy recovering). The remaining parts, based on mass balance, are sent to sanitary landfill. Based on direct consultation and project assumptions the transport distances¹ from energy company storage into the to disassembly facility is 100 km, from disassembly facility to recycling plant and to the oil treatment company is 200 km, meanwhile the range into a landfill is 50 km.

Table 2. End-of-life baseline scenario definition per functional unit (downstream module).

Processes	Value	Unit
Collection process	From energy company storage to recovering market	2,524.60 kg
Recovery system specified by type	Reuse	0.00 kg
	Recycling	1,468.25 kg
	Incineration for energy recovery	0.00 kg
Disposal specified by type	Product or material for final deposition	604.20 kg
	Incineration	452.15 kg
Assumption for scenario development	Assuming that 100% of the transformer is sent for disassembling (based on direct consultation with energy company), assuming that 80% of steel is recycled, 70% of aluminium is recycled, 60% of copper parts are recycled (G.5 section from BSI EN 50693:2019 - Default values for R2) and that the insulating oil is incinerated. Following mass balance principle and Brazilian environmental laws, the remaining parts of the product are sent for final disposal at sanitary landfills.	

¹ The distances for transportation in the downstream phases (excluding distribution) were estimated based on conservative and highly probable scenarios. These assumptions are predicated on the fact that the transformers are to operate exclusively within the city of São Paulo, which is characterized by an extensive network of facilities for the treatment of various types of waste.

Allocation:

Allocation can be defined as the impact factors distribution between the reference product and the coproducts when they are simultaneous and dependent. At Itaipu value chain there is one type of situation where allocation may be required located at two points in end-of-life processes (i.e., the recycling processes) that occurs: at assembling line (core module) due to process waste generation and at EoL (downstream module) due to metal recovering from obsolete transformers.

- **Assembling line and EoL:** regarding to the recycling of steel, silicon-steel, copper and aluminium generated during transformer manufacturing and recovered at EoL, we considered the cut-off approach. According to the core EPDItaly core-PCR (PCR007), for recovery and recycling processes, which take place outside the boundaries of the product system, only impacts related to the transport of the waste to the treatment platform should be considered. Therefore, all the impacts of the waste transportation by road were fully attributed to the Itaipu product.


Cut-off criteria:

The cut-off criteria are applied to support an efficient calculation procedure. According to EN 50693 (2019) and PCR018 (2023), specifically the following flows and operations may be cut-off:

- Production, use and disposal of the packaging of components and semi-finished intermediates;
- Materials making up the transformer itself whose total mass does not exceed 1% of the total weight of the device;
- Material and energy flows related to dismantling phase, whenever it is reasonable to assume that dismantling is performed by adopting manual tools (e.g., screwdrivers, hammers, etc.);
- Devices external to the product itself required for installation;
- Maximum 5% of the overall environmental impact of the analysed product system;

In this LCA, all input and output flows have been considered at 100%, including raw materials as per the product composition provided by the manufacturer as well as the final product. Cut-off criteria was the environmental relevance for infrastructure impacts, although some irrelevant inputs may eventually not be considered, e.g., the cardboard used to clean the moulding machine. For inbound logistics, mass-based cut-off criteria was applied for minor components (screws, washers, rivets, etc). The coverage of inbound logistics was of 99.9% of mass composition for the transformer. At core module welding smokes were cut-off. The only cut-off criterion was the environmental relevance of the production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities.

Description of the system boundaries:

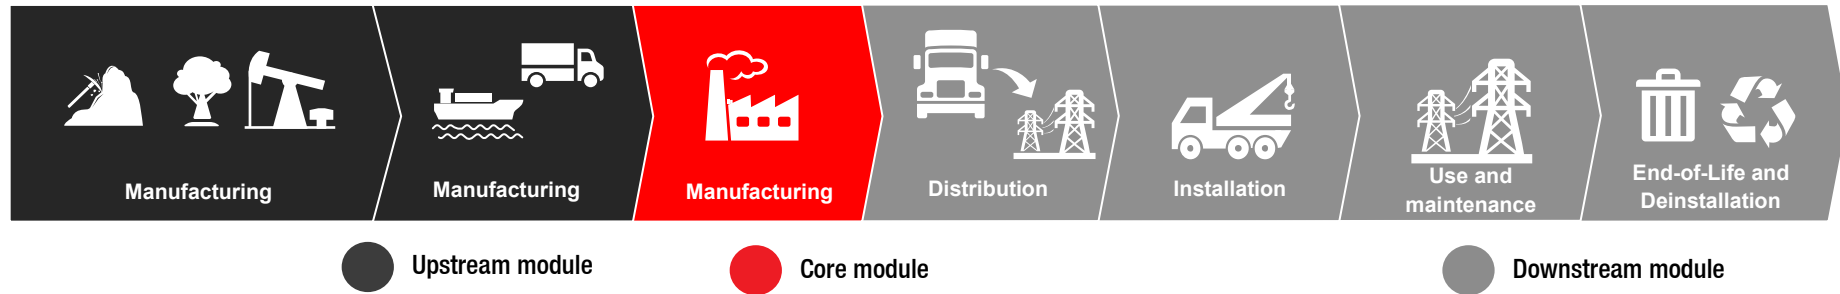

Upstream module

The Three-phase industrial transformer is majorly made of steel and silicon-steel, aluminium/copper, paper/paperboard and oil (tank filled for cooling purposes). There are also minor parts of polymers, chemicals (painting, glue...), rubber and wood for packaging. The upstream module considers all upstream processes to extract such materials and process them into the final components that are inserted into Itaipu manufacturing line, including auxiliary consumptions at the factory such as electricity and others. This stage of the life-cycle accounts for the road and maritime transport of all materials and components from suppliers to Itaipu plant (inbound logistics).

Core module

The Three-phase industrial transformer manufacturing is an assembling line. Metal sheets are cut, bended, calendared, moulded and welded into the final transformer structure (tank, lid and bars). Those parts are cleaned and painted. In parallel, the core is made of silicon-steel and assembled from several different pieces that are cut to be geometrically positioned into the magnetic core that is wrapped with windings prepared with insulated conductor wires and covered with insulating paper. Core and transformer body meet at the final assembling, with connections, cables and other minor parts and are tested for security, functioning and tightness. After packaging, the transformer is stored and ready for shipment. The manufacturing line at Itaipu plant requires ancillary inputs, such as electricity to operate and generate wastes and other outputs. Electricity consumed at Itaipu plant is 100% from renewable source (hydro) meanwhile the major part of wastes are recycled following the internal policies on waste management.

Downstream module

This module encompasses all steps after product expedition from Itaipu manufacturing plant until its End-of-life (EoL). The Transformer is distributed to São Paulo state by large diesel-truck through road transportation. The installation requires a lifting device that works for transport (from energy company storage into the operation point) and to elevate and install the transformer. During 35 years of Reference Service Life (RSL) the Three-phase industrial transformer will convert energy voltage for urban consumption and consumes medium voltage electricity from Brazilian national grid to operate and through losses in the transformation. During this period, an inspection should be made every 12 months of transformer operation to check for leakages, corrosion, and others. Every 5 years, some tests should be made as for example, oil sample for quality analysis, insulating check, etc. If there are no anomalies, no maintenance is necessary. According to Itaipu product specialists, in Brazil many transformers operate until its failure and maintenance is not a controlled practice. When discontinued, the transformer is generally disassembled for metal recovering due to its high aggregated value. In Brazil this may be done at secondary scrap market or by specialized recycling companies. Steel, aluminium, copper and other metallic fractions are recovered and reinserted into the market. Other fractions are more likely to be discarded to sanitary landfill following Brazilian environmental laws. Insulating oil may be recycled or treated in waste management specialized companies depending on its quality when discarded.

Content information

Product components	Material classes*	Weight, kg	Weight-% (versus the product)
Other ferrous alloys, non-stainless steel	M-119	1,558.55	61.73%
Aluminium and its alloys	M-120	106.70	4.23%
Copper and its alloys	M-121	244.54	9.69%
Stainless steel	M-100	4.40	0.17%
Tin and its alloys	M-126	1.13	0.04%
Paper/paperboard	M-341	51.67	2.05%
Wood	M-340	4.80	0.19%
Ceramics	M-160	5.22	0.21%
Oils and greases	M-410	452.15	17.91%
Chemicals (paints, varnish, dilutant, glues)	-	94.37	3.74%
Polymers	-	0.45	0.02%
Rubber	M326	0.62	0.02%
TOTAL	-	2,524	100.00%
Packaging materials	Material classes**	Weight, kg	Weight-% (versus the packaging)
Wooden bars	M-340	90.00	100.00%
TOTAL	-	90.00	100.00%

*According to IEC 62474 - Material Declaration for Products of and for the Electrotechnical Industry;

Substances of very high concern (SVHC)

These products contain no substances of very high concern (SVHC) on the REACH Candidate List published by the European Chemicals Agency in a concentration that exceed 0.01% (w/w).

Environmental Information

Potential environmental impact – mandatory indicators according to core-PCR

Results per a single piece of transformer operating for 35 years								
Indicator*	Unit	Manufacturing stage	Distribution stage	Installation stage	Use and Maintenance stage	Deinstallation stage and End-of-Life	Total**	
		upstream	Core**	downstream				
GWP-total	kg CO ₂ eq	1.13E+04	1.94E+02	6.73E+01	5.11E+01	2.69E+05	1.60E+03	2.83E+05
GWP-fossil	kg CO ₂ eq	1.11E+04	1.94E+02	6.39E+01	4.49E+01	2.16E+05	1.43E+03	2.28E+05
GWP-biogenic**	kg CO ₂ eq	9.04E+01	3.50E-03	1.72E-02	5.00E+00	3.13E+04	1.70E+02	3.16E+04
GWP-luluc	kg CO ₂ eq	6.50E+01	3.45E-03	3.38E+00	1.23E+00	2.24E+04	3.80E+00	2.25E+04
ODP	kg CFC11 eq	9.81E-05	9.68E-07	2.87E-06	1.40E-06	5.93E-03	4.46E-06	6.03E-03
AP	mol H ⁺ eq	2.45E+02	1.54E-01	3.81E-01	1.83E-01	1.39E+03	7.33E-01	1.64E+03
EP-freshwater	kg P eq	8.98E-01	1.24E-04	2.63E-04	1.31E-04	4.31E+00	8.64E-03	5.21E+00
EP-marine	kg N eq	1.55E+01	3.53E-02	2.02E-01	9.14E-02	1.99E+02	5.79E-01	2.16E+02
EP-terrestrial	mol N eq	1.95E+02	3.91E-01	1.90E+00	8.68E-01	2.07E+03	3.44E+00	2.27E+03
POCP	kg NMVOC eq	6.45E+01	1.14E+01	5.34E-01	2.81E-01	7.06E+02	1.17E+00	7.84E+02
ADP-m***	kg Sb eq	2.78E+00	3.87E-06	9.15E-06	4.54E-06	2.51E-02	1.47E-05	2.81E+00
ADP-f***	MJ	1.48E+05	8.61E+02	8.42E+02	5.98E+02	3.02E+06	1.91E+03	3.18E+06
WDP***	m ³ depriv.	4.20E+03	2.39E+00	1.71E+00	-1.35E+01	5.19E+04	-4.31E+01	5.60E+04
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; POCP = Formation potential of tropospheric ozone; ADP-minerals & metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption.							

*The applied characterization factors are associated with the EF 3.1 method. The product covered by the EPD have a variation of more than 10% compared to the set of environmental impacts of the similar product.

**For the GWP-biogenic indicator, it was assumed that carbon uptake is fully emitted at the disposal point, even though degradation may occur over a more extended period within the 100-year timeframe of GWP analysis. Consequently, the biogenic carbon contents of the vegetable oil and paper within the product, as well as the wood composing the packaging (captured throughout their value chains, i.e., - 1 kg CO₂ eq), were manually adjusted to be 100% emitted during the installation phase (for wood packaging) and end-of-life phase (for the vegetal oil and paper), resulting in +1 kg CO₂ eq.

*** Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Potential environmental impact – additional indicators according to core-PCR

Results per a single piece of transformer operating for 35 years								
Indicator*	Unit	Manufacturing stage		Distribution stage	Installation stage	Use and Maintenance stage	Deinstallation stage and End-of-Life	Total*
		upstream	Core*	downstream				
PM	disease inc.	1.17E-03	1.91E-06	8.38E-06	4.17E-06	2.52E-02	2.00E-05	2.64E-02
IRP	kBq U-235 eq	2.03E+02	1.07E-01	4.88E-02	4.85E-02	6.80E+03	3.00E-01	7.01E+03
ETP-fw	CTUe	3.25E+05	2.96E+02	3.41E+03	1.26E+03	3.74E+05	1.38E+04	7.18E+05
HTP-c	CTUh	4.25E-04	3.37E-07	2.57E-08	1.98E-08	3.98E-04	1.55E-07	8.24E-04
HTP-nc	CTUh	2.38E-03	2.49E-06	1.18E-06	4.03E-07	9.87E-04	3.98E-06	3.37E-03
SQP	Pt	1.05E+05	4.68E+00	6.91E+01	7.48E+01	1.64E+06	2.64E+02	1.74E+06
Acronyms	PM = Potential incidence of disease due to PM emissions; IRP = Potential Human exposure efficiency relative to U235; ETP-fw = Potential Comparative Toxic Unit for ecosystems; HTP-c = Potential Comparative Toxic Unit for humans; HTP-nc = Potential Comparative Toxic Unit for humans; SQP = Potential Soil quality index.							

*The applied characterization factors are associated with the EF 3.1 method. The product covered by the EPD have a variation of more than 10% compared to the set of environmental impacts of the similar product.

Use of resources

Results per a single piece of transformer operating for 35 years

			Manufacturing stage	Distribution stage	Installation stage	Use and Maintenance stage	Deinstallation stage and End-of-Life	Total*	
Indicator*		unit	upstream	Core*	downstream				
Primary energy resources - Renewable	Use as energy carrier (PERE)	MJ, net calorific value	2.43E+04	3.17E+00	3.30E+01	1.28E+01	5.22E+06	4.52E+01	5.25E+06
	Use as raw materials (PERM)	MJ, net calorific value	9.21E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.21E+02
	Total (PERT)	MJ, net calorific value	2.52E+04	3.17E+00	3.30E+01	1.28E+01	5.22E+06	4.52E+01	5.25E+06
Primary energy resources - Non-renewable	Use as energy carrier (PENRE)	MJ, net calorific value	7.34E+04	2.00E+01	3.03E+01	1.53E+01	9.06E+05	7.11E+01	9.79E+05
	Use as raw materials (PENRM)	MJ, net calorific value	2.14E+04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.14E+04
	Total (PERNT)	MJ, net calorific value	9.48E+04	2.00E+01	3.03E+01	1.53E+01	9.06E+05	7.11E+01	1.00E+06
Secondary material (MS)		kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable secondary fuels (RSF)		MJ, net calorific value	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable secondary fuels (NRSF)		MJ, net calorific value	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net use of fresh water (FW)		m3	1.28E+02	6.56E-02	1.71E-01	-2.62E-01	8.06E+02	-5.45E-01	9.33E+02

*The applied characterization factors are associated with the EF 3.1 method. The product covered by the EPD have a variation of more than 10% compared to the set of environmental impacts of the similar product.

Waste production and output flows

Waste production

Results per a single piece of transformer operating for 35 years									
Indicator	Unit	Manufacturing stage		Distribution stage	Installation stage	Use and Maintenance stage	Deinstallation stage and End-of-Life	Total	
		upstream	core	downstream					
		Hazardous waste disposed (HWD)	kg	0.00E+00	4.87E+01	0.00E+00	0.00E+00		0.00E+00
Non-hazardous waste disposed (NHWD)	kg	0.00E+00	0.00E+00	0.00E+00	9.00E+01	0.00E+00	1.06E+03	1.15E+03	
Radioactive waste disposed (RWD)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	

The product covered by the EPD have a variation of more than 10% compared to the set of environmental impacts of the similar product.

Output flows

Results per a single piece of transformer operating for 35 years									
Indicator	Unit	Manufacturing stage		Distribution stage	Installation stage	Use and Maintenance stage	Deinstallation stage and End-of-Life	Total	
		upstream	core	downstream					
		Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00		0.00E+00
Material for recycling (MFR)	kg	0.00E+00	1.76E+02	0.00E+00	0.00E+00	0.00E+00	1.47E+03	1.64E+03	
Components for reuse (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
Exported thermal energy (ETE)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
Exported electricity energy (EEE)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	

The product covered by the EPD have a variation of more than 10% compared to the set of environmental impacts of the similar product.

References

BSI (2019) EN 50693:2019 – Product category rules for LCA of electronic and electrical products and systems. Final version, August 2019. British Standard.

[Itaipu-LCA] 500-630-2000 kVA transformer_final_report_v2.1 (April 2025). Life cycle assessment of 500, 630 and 2000 kVA Transformers. Version 2.1. Updated from version 2.0 Issue date 2024/04/16.

EPDIItaly, 2023. Regulations of the EPDIItaly Programme. Revision 6.0. Issue date 2023/10/30.

EPDIItaly, 2022. Operating Instructions – IO-EPD-01. Issue date 2022/07/20.

EPDIItaly007, 2023. Electronic and Electrical Products and Systems. Issue date 2024/11/12 Rev 3.1 core-PCR.

EPDIItaly018, 2024. Electronic and Electrical Products and Systems – Power Transformers. Revision v. 3.6. (2024/07/01) sub-PCR.

IEC (2022). International Electrotechnical Commission IEC 62474 - Material Declaration for Products of and for the Electrotechnical Industry IEC 62474 MCL updated on February 10, 2022. Available in <<https://www.iec.ch/homepage>>. Accessed on March 2022.

ISO (2006a) 14040: Environmental Management - Life Cycle Assessment - Principles and Framework.

ISO (2006b) 14044: Environmental Management - Life Cycle Assessment - Requirements and guidelines.

Preliminary design date: february 09th 2023; Document name and version: Design N° PO-418838-00, ed. 01. Rev. 00.

Product BOM date: April 04th 2023; Document name and version. Lista de Desenhos por Projetos 2.9.04.05. Rev 00.

Contact information

**Author of the Life cycle assessment:**

EnCiclo Soluções Sustentáveis Ltda.
Florianópolis – Santa Catarina
Brazil

Tel: +55 48 99144-9245
+55 11 95694-7217
Mail: guilherme@enciclo.com.br
Web: www.enciclo.com.br

**Owner of the Declaration:**

Indústria de Transformadores Itaipu Ltda.
Avenida Sergio Abdul Nour, 2106,
Distrito Industrial II.
Itápolis – São Paulo
Brazil

Tel: +55 16 3263 9400
Mail: comercial@itaiputransformadores.com.br
Web: www.itaiputransformadores.com.br/



www.epditaly.it